


**EATON** | **Vickers**

**Hydrokraft Piston Motors**  
 Technical Catalog

MVX

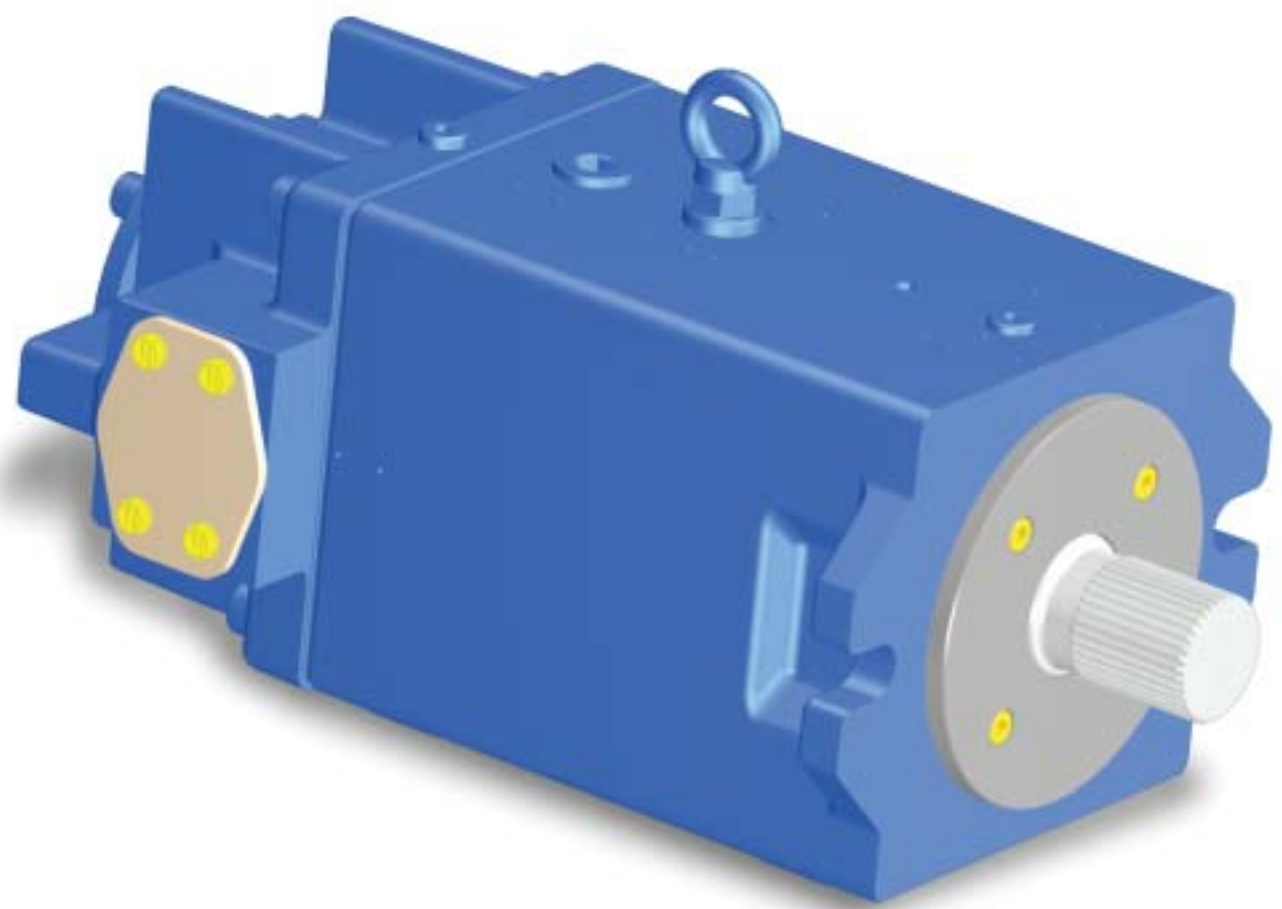

**VICKERS**<sup>®</sup>

# Table of Contents

|                                                           |    |
|-----------------------------------------------------------|----|
| Introduction .....                                        | 3  |
| Model Code                                                |    |
| Form Page .....                                           | 4  |
| Basic Motors .....                                        | 5  |
| No Control .....                                          | 6  |
| ES Control .....                                          | 7  |
| HG Control .....                                          | 8  |
| FE Control .....                                          | 9  |
| DP Control .....                                          | 10 |
| SP Control .....                                          | 11 |
| Special Features .....                                    | 12 |
| Motor Specifications                                      |    |
| US .....                                                  | 13 |
| Metric .....                                              | 14 |
| Controls                                                  |    |
| Electric Motor Displacement Control, ES .....             | 15 |
| Manual Adjustment Displacement Control, FE, HG .....      | 16 |
| Pressure Signal Adjustment Displacement Control, DP ..... | 17 |
| Electrohydraulic Servo Adjustment, SP .....               | 18 |
| Pump Dimensions*                                          |    |
| MFXS-066 - 180** .....                                    | 20 |
| MVXS-066 - 180 ES Control** .....                         | 22 |
| MVXS-066 - 180 HG Control** .....                         | 24 |
| MVXS-066 - 180 FE Control** .....                         | 26 |
| MVXS-066 - 180 DP Control** .....                         | 28 |
| MVXS-066 - 180 SP Control** .....                         | 30 |
| Installation Data .....                                   | 32 |
| Application Data                                          |    |
| Fluid Recommendations .....                               | 33 |

\* Dimensions - MFXS -250 / MVXS-250 ask for special drawings.  
Used only for replacement.

For new applications please use MFWS / MVWS.

\*\* MFXS / MVXS -130/180, for new applications please use MFWS / MVWS-130/180.

# Introduction

- Axial piston motors with swashplate design and can be applied to hydrostatic drives.
- Pressure up to 350 bar. Rated speed up to 1800 min<sup>-1</sup>.
- A range of control options allow matching of motors to any application.
- Rotating and pressure loaded parts are pressure balanced.
- High efficiency from automatic pressure balancing of cylinder block to valve plate.
- Oversized shaft bearings for long life and thru-drive capability.
- Highly resistant to dirt because of automatic wear compensation.
- Low sound level assured by swashplate design and other proven features.

## AVAILABLE DISPLACEMENT SIZES

|         |
|---------|
| 066 ccm |
| 090 ccm |
| 130 ccm |
| 180 ccm |

### Displacement controls:

**ES** - Electric motor displacement control


**HG** - Handwheel displacement control (Special feature)

**FE** - Screw adjustment control (Special feature)

**DP** - Pressure signal displacement control

**SP** - Electro hydraulic displacement control

### Typical section of MFX motor

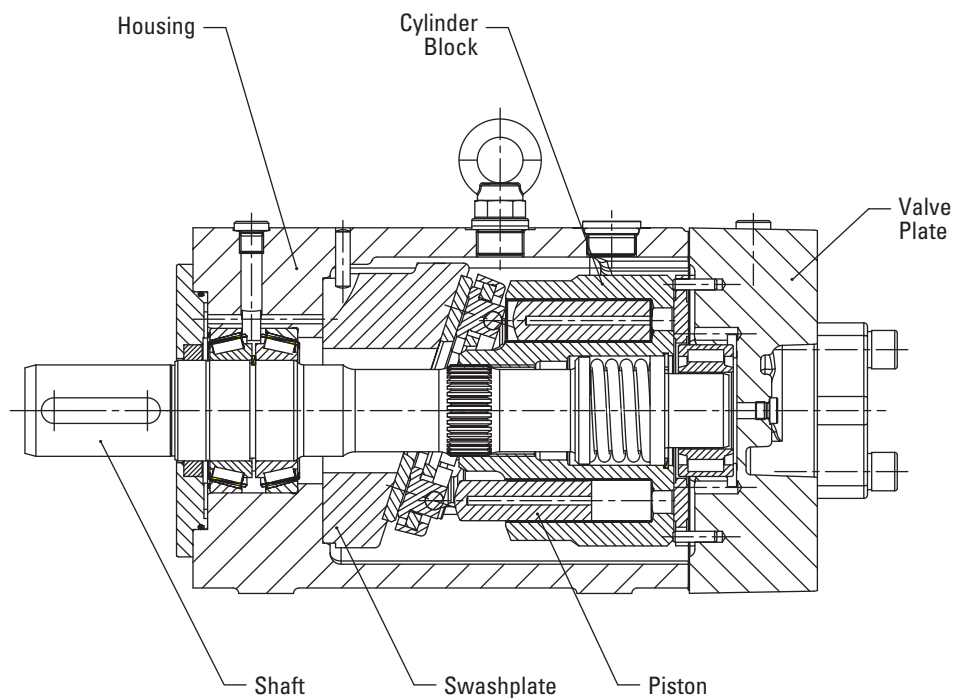

Dimensional information listed in this catalog is subject to change without notice.

# Model Code

Fixed & Variable  
Displacement Motors

"X" Series

### Form Page

The following 42-digit coding system has been developed to identify all of the configuration options for the "X" series fixed and variable displacement motors. Use this model code to specify a unit with the desired features. All 42-digits must be present when ordering. You may want to photocopy the matrix below to ensure, that each number is entered in the correct box. If adjustments other than the standard setting (character 34... 37) or special features (character 38 ... 40) are needed, please provide the information when ordering.

Some characters are already filled out. For such characters there is no option available.

Explanation for each character can be found as follows:

|                                   | CHARACTER | PAGE |
|-----------------------------------|-----------|------|
| Basic Motor Model Code            | 1.....22  | 5    |
| Control Options                   | 23.....33 | 6-11 |
| Customer Adjustment Specification | 34.....37 | 6-11 |
| Special Features                  | 38.....40 | 12   |
| Design Number                     | 41.....42 | 12   |

| 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| M  |    | X  | S  | -  |    |    |    | M  |    |    | B  |    |    | 1  | R  |    |    | S  | V  |    | A  |  |
| 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 |    |    |  |
|    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | 1  | 0  |    |  |

**SPECIFY NON STANDARD ADJUSTMENT BELOW**

---

---

---

---

---

---

---

---

---

---

**SPECIFY SPECIAL FEATURE BELOW**

---

---

---

---

---

---

---

---


---

---

# Model Code

## Motors

### "X" Series - Basic Motor

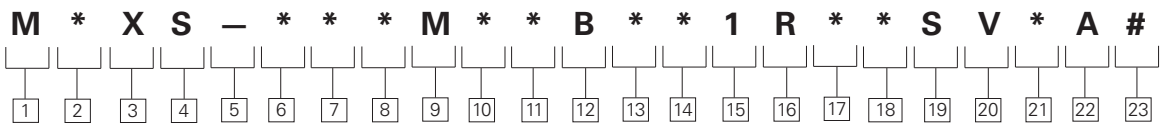

#### 1 Motor

**M** – Motor

#### 2 Displacement

**F** – Fixed Displacement  
**V** – Variable Displacement

#### 3 Pump Series

**X** – "X" Series  
(was 20 design)

#### 4 Configuration

**S** – Single Unit

#### 5 Separator

– Separator

#### 6 7 8 Displacement Size

**066** – 66 cm<sup>3</sup>/r [4.0 in<sup>3</sup>/rev]  
**090** – 90 cm<sup>3</sup>/r [5.5 in<sup>3</sup>/rev]  
**130** – 130 cm<sup>3</sup>/r [7.9 in<sup>3</sup>/rev]  
**180** – 180 cm<sup>3</sup>/r [11.0 in<sup>3</sup>/rev]  
**250** – 250 cm<sup>3</sup>/r [15.3 in<sup>3</sup>/rev]  
(for Spares only)  
**???** – Non-Standard Displacement (MFX Only)

#### 9 Basic Standard

**M** – Metric

#### 10 11 Mounting Flange

**02** – ISO 3019/2-125A2HW  
**04** – ISO 3019/2-160A2HW  
**06** – ISO 3019/2-200A2HW  
See Chart Below

#### 12 Rotation Direction

**B** – Both

#### 13 Adjustment Stops

**0** – No Stop  
**4** – Mechanical Adjustment Stop Side A (MVX only)  
**5** – Mechanical Adjustment Stop Side B (MVX only)  
**6** – Mechanical Adjustment Stops Side A and B (MVX only)

#### NOTE:

**4** is used as max. Adjustment on Side A.  
**5** is used as min. Adjustment stop side A. When **0** is specified, min. Adjustment Stop is set at 35 % of Vgmax  
**6** is the combination of **4** and **5** together

#### 14 Thru-Drive Options

**0** – None  
**K** – Tachogenerator  
**E** – Speed Limit Switch (Two Switches)

#### 15 Main Ports

**1** – SAE Ports - Metric Bolts

#### 16 Main Port Orientation

**R** – Radial (Side Ports)

#### 17 18 Main Drive Shaft End

**01** – ISO Straight Key  
**02** – ISO Spline

#### 19 Drive Shaft Seal Configuration

**S** – Single Shaft Seal

#### 20 Seal Material

**V** – Viton\*  
\*Viton is a trademark of E.I. DuPont (other materials available, contact your Eaton Representative)

#### 21 Yoke Position Indicator

**0** – No Position Indicator  
**V** – Visual Position Indicator  
**P** – Position Sensor  
**M** – Sensor with Visual Indicator

#### 22 Surface Finish

**A** – Blue Painted  
Other options on special request available. Contact Eaton Sales.

#### 23 Add Control Model Code


**Code** – Code (characters 23...37) on the following pages

| MOUNTING FLANGE OPTIONS AVAILABLE | 066 | 090 | 130 | 180 | 250 |
|-----------------------------------|-----|-----|-----|-----|-----|
| ISO 3019/2-125A2HW                | 18  | 19  |     |     |     |
| ISO 3019/2-160A2HW                |     |     | 20  | 21  |     |
| ISO 3019/2-200A2HW                |     |     |     |     | 22  |

# Model Code

## Motors

"X" Series - No Control

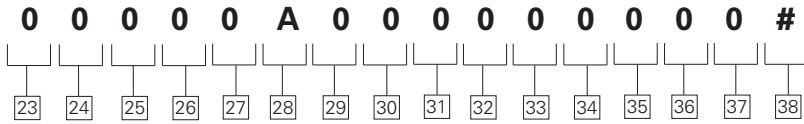

**23 24 Control Type**

**00** – No Control  
(for MFW only)

**25 Displacement Adjustment Options**

**0** – Not Applicable

**26 27 Electronic Controls**

**00** – Not Required

**28 Yoke Displacement Zone**

**A** – Single Side of Center "A"

**29 Extra Functions**

**0** – Not Required

**30 Pressure Control Options**

**0** – Not Applicable

**31 Position Monitoring**

**0** – No Position Monitoring

**32 Electric Motor Type**

**0** – No Electric Motor

**33 Control Voltage**

**0** – Not Applicable

**34 35 36 37 Customer Adjustment Specification**

**0000** – None


**38 Special Features**

Add special feature description (characters 44...46) on page 12 if required.

# Model Code

## Motors

"X" Series - ES Control

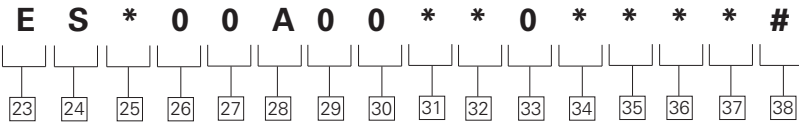

**23 24 Control Type**

**ES** – Electric Motor Displacement Control

**25 Displacement Adjustment Options**

- M** – Electric Motor - (Fast Response)
- N** – Electric Motor - (Medium Response)
- P** – Electric Motor - (Slow Response)

**26 27 Electronic Controls**

**00** – Not Required

**28 Yoke Displacement Zone**

**A** – Single Side of Center "A"

**29 Extra Functions**

**0** – Not Required

**30 Pressure Control Options**

**0** – Not Applicable

**31 Position Monitoring**

- A** – 4 Limit Switches
- B** – 8 Limit Switches
- P** – 4 Limit Switches + Sensor
- T** – 8 Limit Switches + Sensor

**32 Electric Motor Type**

- 2** – Motor with Brake (IP-54)
- 3** – Motor without Brake (Explosion Proof)

**33 Control Voltage**

**0** – Not Applicable

**34 35 36 37 Customer Adjustment Specification**

**0000** – None  
**????** – Yes (final number will be assigned by Eaton. Specify on table below)

**38 Special Features**

Add special feature description (characters 38...42) on page 12 if required.

**CUSTOMER ADJUSTMENT SPECIFICATIONS**

|                                                            |   | Unit                 | Standard Adjustment      | Customer Specified Adjustment | Remarks            |
|------------------------------------------------------------|---|----------------------|--------------------------|-------------------------------|--------------------|
| All Revolution Adjustments Set at                          |   | rpm                  | 1500                     | —                             |                    |
| Mech. Stop Side A<br>(Used as Max. Adjustment Stop Side A) |   | cm <sup>3</sup> /rev | Vg <sub>max</sub>        |                               |                    |
| Mech. Stop Side B<br>(Used as Max. Adjustment Stop Side A) |   | cm <sup>3</sup> /rev | 35 5/8 Vg <sub>max</sub> |                               | < 35% not possible |
| Displacement Adjusted to                                   |   | cm <sup>3</sup> /rev | 60% Vg <sub>max</sub>    |                               |                    |
| Position Monitoring Switch                                 | 1 | cm <sup>3</sup> /rev | 35% Vg <sub>max</sub>    |                               | < 35% not possible |
|                                                            | 2 | cm <sup>3</sup> /rev | 95% Vg <sub>max</sub>    |                               | > 95% not possible |
|                                                            | 3 | cm <sup>3</sup> /rev | —                        |                               |                    |
|                                                            | 4 | cm <sup>3</sup> /rev | —                        |                               |                    |
|                                                            | 5 | cm <sup>3</sup> /rev | —                        |                               |                    |
|                                                            | 6 | cm <sup>3</sup> /rev | —                        |                               |                    |
|                                                            | 7 | cm <sup>3</sup> /rev | —                        |                               |                    |
|                                                            | 8 | cm <sup>3</sup> /rev | —                        |                               |                    |

# Model Code

Motors

"X" Series - HG Control

|          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| <b>H</b> | <b>G</b> | <b>0</b> | <b>0</b> | <b>0</b> | <b>A</b> | <b>0</b> | <b>0</b> | <b>0</b> | <b>0</b> | <b>0</b> | <b>*</b> | <b>*</b> | <b>*</b> | <b>*</b> | <b>#</b> |
| □        | □        | □        | □        | □        | □        | □        | □        | □        | □        | □        | □        | □        | □        | □        | □        |
| 23       | 24       | 25       | 26       | 27       | 28       | 29       | 30       | 31       | 32       | 33       | 34       | 35       | 36       | 37       | 38       |

**23 24 Control Type**

**HG** – Handwheel Displacement Control

**25 Displacement Adjustment Options**

**0** – Not Applicable

**26 27 Electronic Controls**

**00** – Not Required

**28 Yoke Displacement Zone**

**A** – Single Side of Center "A"

**29 Extra Functions**

**0** – Not Required

**30 Pressure Control Options**

**0** – Not Applicable

**31 Position Monitoring**

**0** – No Position Monitoring

**32 Electric Motor Type**

**0** – No Electric Motor

**33 Control Voltage**

**0** – Not Applicable

**34 35 36 37 Customer Adjustment Specification**

**0000** – None

**????** – Yes (final number will be assigned by Eaton. Specify on table below)

**38 Special Features**

Add special feature description (characters 38..42) on page 12 if required.

**CUSTOMER ADJUSTMENT SPECIFICATIONS**


|                                   | Unit                 | Standard Adjustment | Customer Specified Adjustment | Remarks |
|-----------------------------------|----------------------|---------------------|-------------------------------|---------|
| All Revolution Adjustments Set at | rpm                  | 1500                | —                             |         |
| Displacement Adjusted to          | cm <sup>3</sup> /rev | V <sub>gmax</sub>   |                               |         |



# Model Code

## Motors

"X" Series - FE Control

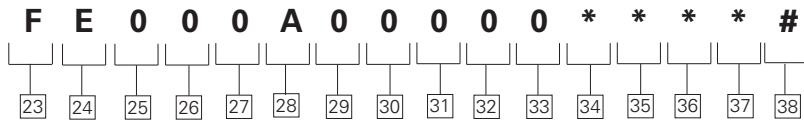

**23 24 Screw Adjustment Displacement Control**

FE – Screw Adjustment Displacement Control

**25 displacement Adjustment Options**

0 – Not Applicable

**26 27 Electronic Controls**

00 – Not Required

**28 Yoke Displacement Zone**  
A – Single Side of Center "A"

**29 Extra Functions**

0 – Not Required

**30 Pressure Control Options**

0 – Not Applicable

**31 Position Monitoring**

0 – No Position Monitoring

**32 Electric Motor Type**

0 – No Electric Motor

**33 Control Voltage**

0 – Not Applicable

**34 35 36 37 Customer Adjustment Specification**

0000 – None

???? – Yes (final number will be assigned by Eaton. Specify on table below)

**38 Special Features**

Add special feature description (characters 38..42) on page 12 if required.


**CUSTOMER ADJUSTMENT SPECIFICATIONS**

|                                   | Unit                 | Standard Adjustment | Customer Specified Adjustment | Remarks |
|-----------------------------------|----------------------|---------------------|-------------------------------|---------|
| All Revolution Adjustments Set at | rpm                  | 1500                | —                             |         |
| Displacement Adjusted to          | cm <sup>3</sup> /rev | Vg <sub>max</sub>   |                               |         |

# Model Code

## Motors

"X" Series - DP Control

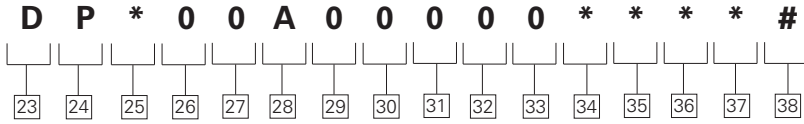

**23 24 Control Type**

**DP** – Pressure Signal Adjustment  
Displacement Control

**25 Displacement**

**Adjustment Options**

**G** – Mounting Interface  
Cetop 3 Only  
**H** – Remote Port G 1/4  
**J** – Proportional Relief inc.  
Electronics

**26 27 Electronic Controls**

**00** – Not Required

**28 Yoke Displacement Zone**

**A** – Single Side of Center "A"

**29 Extra Functions**

**0** – Not Required

**30 Pressure Control Options**

**0** – Not Applicable

**31 Position Monitoring**

**0** – No Position Monitoring

**32 Electric Motor Type**

**0** – No Electric Motor

**33 Control Voltage**

**0** – Not Applicable

**34 35 36 37 Customer Adjustment Specification**

**0000** – None  
**????** – Yes (final number will be assigned by Eaton. Specify on table below)

**38 Special Features**

Add special feature description (characters 38...42) on page 12 if required.


**CUSTOMER ADJUSTMENT SPECIFICATIONS**

|                                                           | Unit                  | Standard Adjustment      | Customer Specified Adjustment | Remarks           |
|-----------------------------------------------------------|-----------------------|--------------------------|-------------------------------|-------------------|
| All Revolution Adjustments below set at ..                | rpm                   | 1500                     | —                             |                   |
| Pilot Pressure for Size 250 & 360 (External)              | bar                   | 60                       | —                             |                   |
| Pilot Pressure for Size 500 & 750 (External)              | bar                   | 80                       | —                             |                   |
| Mech. Stop Side A<br>(used as max Adjustment Stop Side A) | cm <sup>3</sup> /rev. | Vg <sub>max</sub>        |                               |                   |
| Mech. Stop Side B<br>(used as min Adjustment Stop Side A) | cm <sup>3</sup> /rev. | 35% of Vg <sub>max</sub> |                               | <35% not possible |

# Model Code

## Motors

"X" Series - SP Control

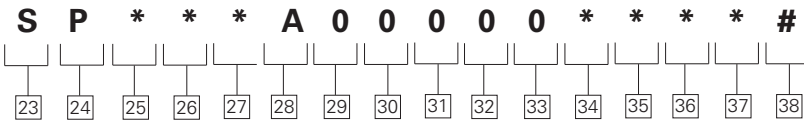

**23 24 Control Type**

**SP** – Proportional Valve Displacement Control

**25 Displacement Adjustment Options**

**C** – With CETOP 3 Prop Valve KDG4V 3  
**F** – With CETOP 5 Prop Valve

**26 27 Electronic Controls**

03 – ER 9.3 - 10 (CETOP 3)  
 04 – ER 9.4 - 10 (CETOP 5)

**28 Yoke Displacement Zone**

**A** – Single Side of Center "A"

**29 Extra Functions**

**0** – Not Required

**30 Pressure Control Options**

**0** – Not Applicable

**31 Position Monitoring**

**0** – No Position Monitoring

**32 Elec Motor Type**

**0** – No Electric Motor

**33 Control Voltage**

**0** – Not Applicable

**34 35 36 37 Customer Adjustment Specification**

**0000** – None  
**????** – Yes (final number will be assigned by Eaton. Specify on table below)

**38 Special Features**

Add special feature description (characters 38..40) on page 12 if required.


**\*CUSTOMER ADJUSTMENT SPECIFICATIONS**

|                                                           | Unit                  | Standard Adjustment              | Customer Specified Adjustment       | Remarks                 |
|-----------------------------------------------------------|-----------------------|----------------------------------|-------------------------------------|-------------------------|
| All Revolution Adjustments below set at ..                | rpm                   | 1500                             | —                                   |                         |
| Pilot Pressure                                            | bar                   | 60                               | —                                   |                         |
| Mech. Stop Side A<br>(used as max Adjustment Stop Side A) | cm <sup>3</sup> /rev. | Vg <sub>max</sub>                |                                     |                         |
| Mech. Stop Side B<br>(used as min Adjustment Stop Side B) | cm <sup>3</sup> /rev. | 35% of Vg <sub>max</sub>         |                                     |                         |
| Max. Stop by Control Side A                               | cm <sup>3</sup> /rev. | 95% of Vg <sub>max</sub>         | EI Card Adjustment done by customer | Refer to EI card Manual |
| Min. Stop by Control Side A                               | cm <sup>3</sup> /rev. | 35% of Vg <sub>max</sub> +/-2.5% | EI Card Adjustment done by customer | Refer to EI card Manual |
| Ramp Time 0 → A For 100% Stroke                           | sec                   | 0                                | EI Card Adjustment done by customer | Refer to EI card Manual |
| Ramp Time A → 0 For 100% Stroke                           | sec                   | 0                                | EI Card Adjustment done by customer | Refer to EI card Manual |
| Preset Input Signals S1....S4                             | L/min                 | —                                | EI Card Adjustment done by customer | Refer to EI card Manual |

# Model Code

## Motors

### "X" Series - Special Features



#### 38 39 40 Special Features

000 – None

??? – Defined by Eaton

---

#### 41 42 Design Number

10 – Design Number

# Motor Specifications - U.S.

| MODEL                      |                                  |                    | MFW / MVW 66                                                  | MFW / MVW 90           | MFW / MVW 130          | MFW / MVW 180                  |
|----------------------------|----------------------------------|--------------------|---------------------------------------------------------------|------------------------|------------------------|--------------------------------|
| Design                     |                                  |                    | swashplate type                                               |                        |                        |                                |
| Type of mounting           |                                  |                    | Flange- or foot-mounted. Combination units foot mounted only. |                        |                        |                                |
| Pipe connection SAE Flange | B<br>A                           | psi                | 1" = 6000<br>1" = 6000                                        | 1" = 6000<br>1" = 6000 | 1" = 6000<br>1" = 6000 | 1 1/4" = 6000<br>1 1/4" = 6000 |
| Direction of rotation      |                                  |                    | Bi - directional                                              |                        |                        |                                |
| Speed range                | $n_{min}^{1)}$<br>$n_{max}^{2)}$ | rpm                | 80<br>1800                                                    |                        |                        |                                |
| Installation position      |                                  |                    | Optional, see mounting information                            |                        |                        |                                |
| Ambient temperature range  | min<br>max                       | °F                 | -4<br>122                                                     |                        |                        |                                |
| Weight                     | M                                | lbs.               | 121                                                           | 165                    | 234                    | 251                            |
| Mass of inertia            | J                                | lb ft <sup>2</sup> | 0.38                                                          | 0.38                   | 1.068                  | 1.068                          |

## HYDRAULIC CHARACTERISTICS

|                                                 |                                                |                 |                                                                                                                                         |      |      |      |
|-------------------------------------------------|------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------|------|------|------|
| Nominal pressure (100% duty cycle)              | $p_N$                                          | psi             | 5000                                                                                                                                    |      |      |      |
| Output pressure                                 | $p_{Amin} / p_{Bmin}$<br>$p_{Bmax} / p_{Amax}$ | psi             | 30<br>Pressure can be applied to the motor outlet but the sum of $p_{Amax}$ and $p_{Bmax}$ must not exceed the maximum value of 6090psi |      |      |      |
| Maximum pressure to DIN 24312                   | $p_{max}$                                      | psi             | 6090                                                                                                                                    |      |      |      |
| Hydraulic fluid                                 |                                                |                 | Hydraulic oil to DIN 51524 part 2. Refer to section Application Data-Fluid Recommendations                                              |      |      |      |
| Hydraulic fluid temperature range               | min<br>max                                     | °F              | -13 (on startup)<br>194                                                                                                                 |      |      |      |
| Viscosity range for continuous operation        | min<br>max                                     | cSt<br>cSt      | 10<br>75                                                                                                                                |      |      |      |
| Maximum permissible start viscosity             | max                                            | cSt             | 1000                                                                                                                                    |      |      |      |
| Filtering                                       | ISO 4406                                       |                 | 18/15/13                                                                                                                                |      |      |      |
| Maximum geometric absorption rate <sup>3)</sup> | $V_{gmax}$                                     | in <sup>3</sup> | 4.1                                                                                                                                     | 5.5  | 7.9  | 11.0 |
| Minimum geometric absorption rate               | $V_{gmin}$                                     | in <sup>3</sup> | When no minimum adjustment stop is specified, min. geometric absorption rate is set at 35% of $V_{gmax}$                                |      |      |      |
| Maximum geometric motor flow                    | $Q_g$                                          | USgpm           | 31.4                                                                                                                                    | 42.8 | 61.8 | 85.6 |
| Case pressure                                   | $p_{Vmax}$                                     | psi             | max. 7.2psi over $p_{Amin} / p_{Bmin}$ , $p_{Vmax} = 58$ psi abs.,<br>$p_{Vmax} = 87$ psi abs. with special shaft seal                  |      |      |      |

## DRIVE

|                                                                                           |           |       |     |     |     |     |
|-------------------------------------------------------------------------------------------|-----------|-------|-----|-----|-----|-----|
| Maximum driving torque -<br>( $p_{Amax}$ or $p_{Bmax}$ , $\eta = 100\%$ )                 | M1 single | lb.ft | 325 | 444 | 640 | 887 |
| Maximum power consumption - $n=1800$ rpm<br>( $p_{Amax}$ or $p_{Bmax}$ , $\eta = 100\%$ ) | P1 single | hp    | 112 | 152 | 220 | 304 |

## COMBINATION UNITS

|                                                             |    |       |        |        |        |        |
|-------------------------------------------------------------|----|-------|--------|--------|--------|--------|
| Maximum driving torque - comb. unit<br>(splined shaft only) | M1 | lb.ft | 2x 325 | 2x 444 | 2x 640 | 2x 887 |
|-------------------------------------------------------------|----|-------|--------|--------|--------|--------|

- 1) Minimum speed for continuous operation
- 2) Higher speed available on request
- 3) Tolerance + 1%

# Motor Specifications - Metric

| MODEL                      |                                  |                   | MFW / MVW 66                                                 | MFW / MVW 90           | MFW / MVW 130          | MFW / MVW 180                  |
|----------------------------|----------------------------------|-------------------|--------------------------------------------------------------|------------------------|------------------------|--------------------------------|
| Design                     |                                  |                   | swashplate type                                              |                        |                        |                                |
| Type of mounting           |                                  |                   | Flange or foot-mounted. Combination units foot mounted only. |                        |                        |                                |
| Pipe connection SAE Flange | B<br>A                           | psi               | 1" = 6000<br>1" = 6000                                       | 1" = 6000<br>1" = 6000 | 1" = 6000<br>1" = 6000 | 1 1/4" = 6000<br>1 1/4" = 6000 |
| Direction of rotation      |                                  |                   | Bi - directional                                             |                        |                        |                                |
| Speed range                | $n_{min}^{1)}$<br>$n_{max}^{2)}$ | $min^{-1}$        | 80<br>1800                                                   |                        |                        |                                |
| Installation position      |                                  |                   | Optional, see mounting information                           |                        |                        |                                |
| Ambient temperature range  | min<br>max                       | °C                | -20<br>50                                                    |                        |                        |                                |
| Weight                     | M                                | kg                | 55                                                           | 75                     | 106                    | 114                            |
| Mass of inertia            | J                                | kg m <sup>2</sup> | 0,016                                                        | 0,016                  | 0,045                  | 0,045                          |

## HYDRAULIC CHARACTERISTICS

|                                                 |                                                |                 |                                                                                                                                        |     |     |     |
|-------------------------------------------------|------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|
| Nominal pressure (100% duty cycle)              | $p_N$                                          | bar             | 350                                                                                                                                    |     |     |     |
| Output pressure                                 | $p_{Amin} / p_{Bmin}$<br>$p_{Bmax} / p_{Amax}$ | bar             | 2<br>Pressure can be applied to the motor outlet but the sum of $p_{Amax}$ and $p_{Bmax}$ must not exceed the maximum value of 420 bar |     |     |     |
| Maximum pressure to DIN 24312                   | $p_{max}$                                      | bar             | 420                                                                                                                                    |     |     |     |
| Hydraulic fluid                                 |                                                |                 | Hydraulic oil to DIN 51524 part 2. Refer to section Application Data-Fluid Recommendations                                             |     |     |     |
| Hydraulic fluid temperature range               | min<br>max                                     | °C              | -25 (on startup)<br>90                                                                                                                 |     |     |     |
| Viscosity range for continuous operation        | min<br>max                                     | cSt<br>cSt      | 10<br>75                                                                                                                               |     |     |     |
| Maximum permissible start viscosity             | max                                            | cSt             | 1000                                                                                                                                   |     |     |     |
| Filtering                                       | ISO 4406                                       |                 | 18/15/13                                                                                                                               |     |     |     |
| Maximum geometric absorption rate <sup>3)</sup> | $V_{gmax}$                                     | cm <sup>3</sup> | 66                                                                                                                                     | 90  | 130 | 180 |
| Minimum geometric absorption rate               | $V_{gmin}$                                     | cm <sup>3</sup> | When no minimum adjustment stop is specified, min. geometric absorption rate is set at 35% of $V_{gmax}$                               |     |     |     |
| Maximum geometric motor flow                    | $Q_g$                                          | l / min         | 119                                                                                                                                    | 162 | 234 | 324 |
| Case pressure                                   | $p_{vmax}$                                     | bar             | max. 0.5 bar over $p_{Amin} / p_{Bmin}$ , $p_{vmax} = 4$ bar abs.,<br>$p_{vmax} = 6$ bar abs. with special shaft seal                  |     |     |     |

## DRIVE

|                                                                                                       |           |    |     |     |     |      |
|-------------------------------------------------------------------------------------------------------|-----------|----|-----|-----|-----|------|
| Maximum driving torque - single unit<br>( $p_{Amax}$ or $p_{Bmax}$ , $\eta = 100\%$ )                 | M1 Single | Nm | 441 | 602 | 869 | 1203 |
| Maximum power consumption - $n=180 \text{ min}^{-1}$<br>( $p_{Amax}$ or $p_{Bmax}$ , $\eta = 100\%$ ) | P1 Single | kW | 83  | 114 | 164 | 227  |

## COMBINATION UNITS

|                                                             |    |    |       |       |       |        |
|-------------------------------------------------------------|----|----|-------|-------|-------|--------|
| Maximum driving torque - comb. unit<br>(splined shaft only) | M1 | Nm | 2x441 | 2x602 | 2x869 | 2x1203 |
|-------------------------------------------------------------|----|----|-------|-------|-------|--------|

1) Minimum speed for continuous operation

2) Higher speed available on request

3) Tolerance + 1%




# Electric Motor Displacement Control ES

"X" Series - Motors

This ES control adjusts the swashplate angle of the pump by means of a three phase electric servo motor, worm gearing and a switch box with 4 or (optional) 8 limit switches for different positions. A potentiometer for stepless adjustment and/or position monitoring is also available.

The response times from zero to maximum depends on the chosen ratio and the (fixed) speed of the servo motor (this means that once the control is defined and built the response times are not variable during operation).

Explosion protection versions are also available.

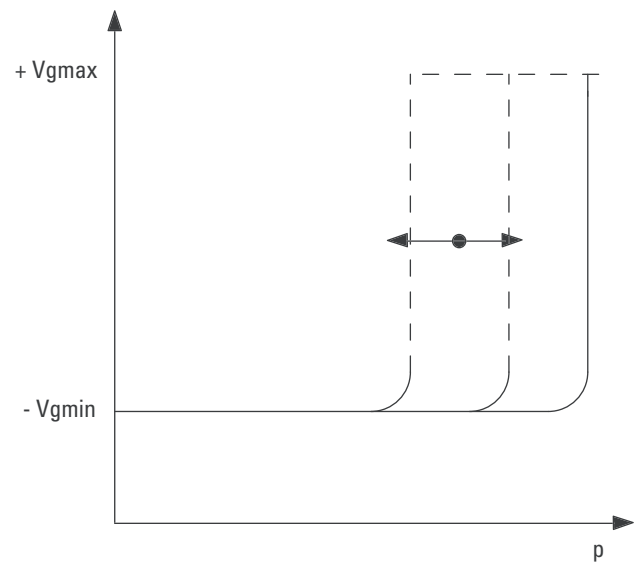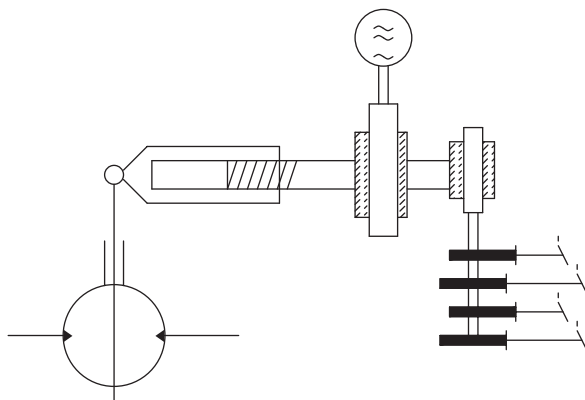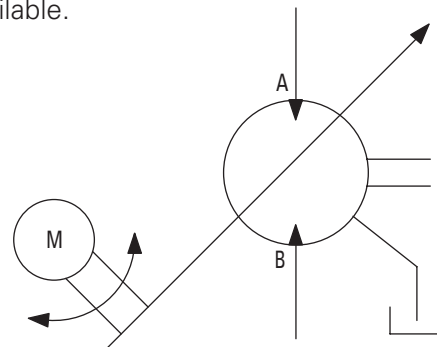

## MVX Response times ES - Control


| Size         | THEORETICAL RESPONSE TIME (SEC)<br>FOR MAXIMUM DISPLACEMENT |    |           |    | CHARACTER IN<br>MODEL CODE POS.25 |    |
|--------------|-------------------------------------------------------------|----|-----------|----|-----------------------------------|----|
|              | 066 / 090                                                   |    | 130 / 180 |    | 250                               |    |
| Frequency Hz | 50                                                          | 60 | 50        | 60 | 50                                | 60 |
| Fast         | 5                                                           | 4  | 12        | 10 | 10                                | 9  |
| Medium       | 16                                                          | 13 | 23        | 19 | 20                                | 16 |
| Slow         | 25                                                          | 21 | 35        | 30 | 31                                | 26 |

Response time from Vgmin (35%) to +Vgmax (100%)

# FE, HG Manual Adjustment Displacement Control

"X" Series - Motors


**FE** The FE control is a displacement control where the motor's swashplate angle is adjusted by a screw.

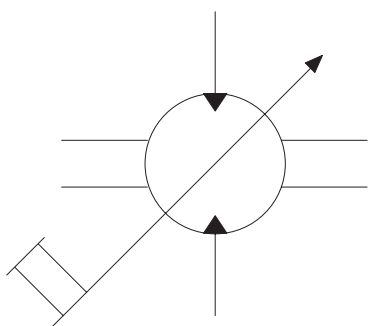

**HG** The HG control is a displacement control where the motor's swashplate angle can be adjusted by a handwheel.

The max. (and/or min.) swashplate angle can be limited by a spacer inside the control cylinder (pos. no. 13 in model coding, options 4, 5 or 6 in combination

with customer adjustment specification in position 34-37 for the set values). The setting must be defined before ordering and cannot be modified during operation.

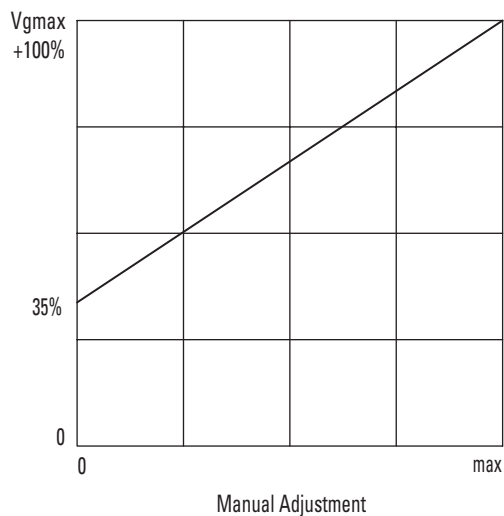



# DP Pressure Signal Adjustment Displacement Control

"X" Series - Motors



The swivel angle of the motor is proportional to the pilot pressure.

A separate pilot oil circuit is necessary. This circuit should be external to prevent the influence of variable motor speed to the pilot oil flow i.e. response time. From this the control pressure is reduced to the desired set value by means of a suitable pressure control valve (with P-T line) and throttle in P line 0.8 Ø (0.03 in).

The DP control can be used for stepless adjustment of the swashplate angle with standard requirements in dynamic and precision. No feedback signal is needed, an optical indicator recommended (pos. 21 in model coding, option "V").

The maximum swashplate angle of the motor can be limited mechanically to between 50% and 100% by a screw. As an additional option the max. (and/or min.) value can be limited by a spacer inside the control cylinder (pos. no. 13 in model coding, options 4, 5 or 6 in combination with customer adjustment specification in position 34-37 for the set values).

This solution is also recommended for very rough operating conditions and the need of a very exact repeatability over a long time period. The setting must be defined before ordering and cannot be modified during operation.

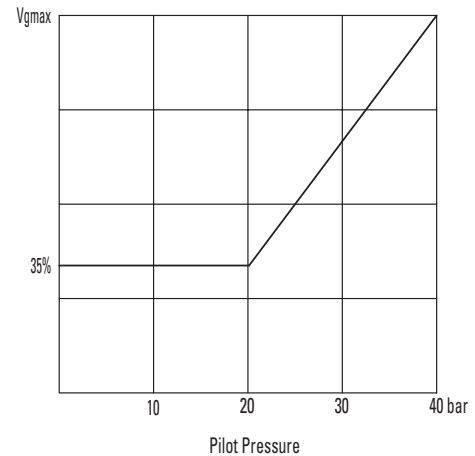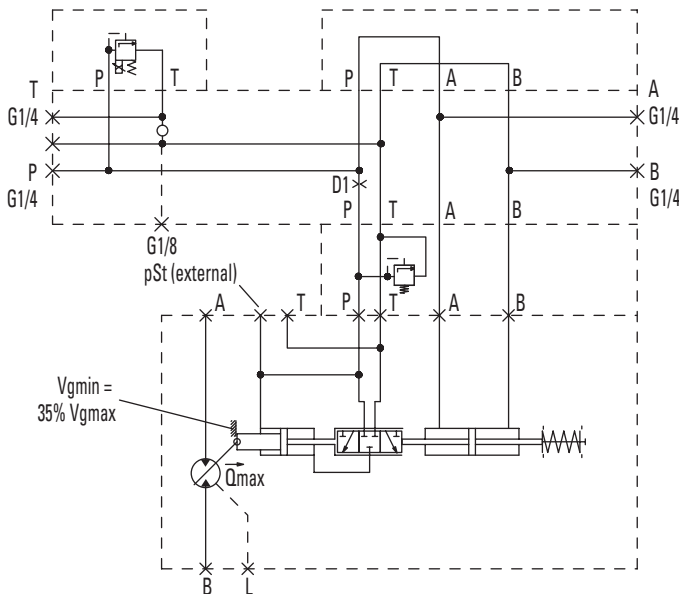

| SIZE    | RESPONSE TIME (SEC)<br>WITH 12 L/MIN PILOT<br>OIL FLOW (STANDARD) | PILOT<br>PRESSURE<br>PST (BAR) |
|---------|-------------------------------------------------------------------|--------------------------------|
| 066/090 | 0,5                                                               | 60                             |
| 130/180 | 0,7                                                               | 60                             |
| 250     | 0,9                                                               | 60                             |

Response time from Vgmin (35%) to +Vgmax (100%)

# Electrohydraulic Servo Adjustment "SP"

"X" Series - Motors



The Electro hydraulic displacement control works without throttle losses within electrically adjustable limits. This is done by controlling swashplate angle with electrical feedback (electrical closed loop control). A separate pilot oil circuit is necessary. This circuit should be external to prevent the influence of variable

motor speed to the pilot oil flow i.e. response time. The swashplate angle is recorded as an electrical signal and lead back to the control card. The proportional valve and servo piston transform the output signal of the control card to the desired setting. This results in very precise and dynamic control.

Hysteresis, consistency: approximately 1% of end value.

The maximum swashplate angle of the motor can be limited mechanically to between 50% and 100% by screw. As an additional option the max. (and/or min.) flow can be limited by a spacer inside the control cylinder (pos. no. 13 in model coding, options 4, 5 or 6 in

combination with customer adjustment specification in position 40-43 for the set values). This solution is also recommended for very rough operating conditions and the need for very exact repeatability over a long time period. The setting must be defined before ordering and cannot be modified during operation.

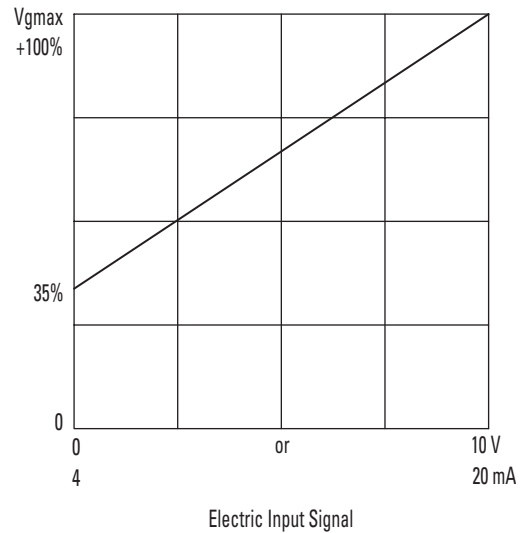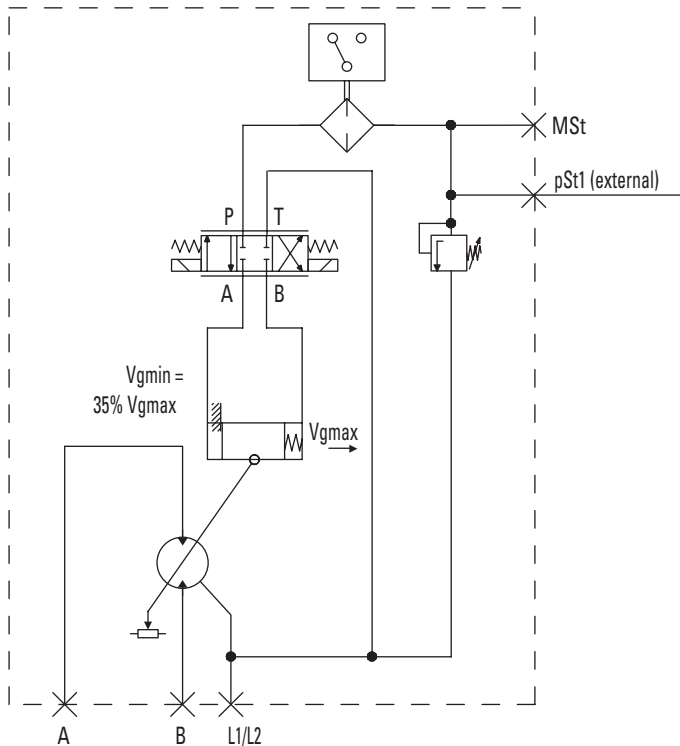

# Electrohydraulic Servo Adjustment "SP" (Cont.)

"X" Series - Motors

## Response Times - Electronic Control Cards

| PROPORTIONAL VALVE               | PILOT OIL<br>FLOW L/MIN<br>(USGPM) | PILOT OIL<br>PRESSURE<br>PST<br>BAR (PSI) | CONTROL<br>ELECTRONICS<br>(AMP. CARD) | RESPONSE                    | UNIT<br>SIZE<br>CM <sup>3</sup> | SERVO PISTON<br>DIAMETER<br>MM (IN) | STROKE<br>MM (IN) | VOLUME<br>CM <sup>3</sup> (IN <sup>3</sup> )<br>PER CHAMBER |
|----------------------------------|------------------------------------|-------------------------------------------|---------------------------------------|-----------------------------|---------------------------------|-------------------------------------|-------------------|-------------------------------------------------------------|
|                                  |                                    |                                           |                                       | TIME<br>VMIN< >VMAX<br>[MS] |                                 |                                     |                   |                                                             |
| Medium response                  |                                    | 60 (857)                                  |                                       | 170                         | 066 / 090                       | 40 / 30 (1.57 / 1.18)               | 18 (.71)          | 10,0 (.611)                                                 |
| KDG4V3-2 C20NMMUH760<br>(CETOP3) | 12 (3.17)                          | 60 (857)                                  | ER9.3-10                              | 230                         | 130 / 180                       | 55 / 38 (2.16 / 1.49)               | 23 (.89)          | 28,3 (1.725)                                                |
| High response (CETOP5)           | On request                         | 60 (857)                                  |                                       | 375                         | 250                             | 70 / 50 (2.76 / 1.97)               | 28 (1.11)         | 52,6 (3.213)                                                |

The ER9.3-10 and ER 9.4-10 (for High Response) digital Amplifier cards are optimized for use with the SP - Control. Please ask for separate Documentation. Software is available for parameter setting and storing (database function). Contact Eaton to request free of charge manual and software CD.

# Dimensions - MFXS 066, 090, 130, 180

- L1 Drainage resp. filling of the housing
- MA Gauge port G1/4"
- MB Gauge port G1/4"

## Non-Standard Displacement:


| SIZE | REDUCED DISPLACEMENT AVAILABLE |
|------|--------------------------------|
| 066  | 55 or 44 ccm / rev             |
| 090  | 75 or 60 ccm / rev             |
| 130  | 115 or 94 ccm / rev            |
| 180  | 160 or 130 ccm / rev           |




| DIRECTION OF ROTATION | INLET PORT (HIGH PRESSURE SIDE) | OUTLET PORT (LOW PRESSURE SIDE) |
|-----------------------|---------------------------------|---------------------------------|
| Right Hand Rotation   | B                               | A                               |
| Left Hand Rotation    | A                               | B                               |

| SIZE | SAE-FLANGE 6000PSI |
|------|--------------------|
| 066  | 1"                 |
| 090  | 1"                 |
| 130  | 1"                 |
| 180  | 1 1/4"             |

| SIZE | B1  | B2  | B3  | B4  | B6  | B7<br>h9 |
|------|-----|-----|-----|-----|-----|----------|
| 066  | 210 | 175 | 120 | 155 | 180 | 10       |
| 090  | 210 | 175 | 120 | 155 | 180 | 10       |
| 130  | 260 | 240 | 150 | 200 | 224 | 14       |
| 180  | 260 | 240 | 150 | 200 | 224 | 14       |

| SIZE | D1<br>h8 | D2<br>k6 | D3  | D4 | D5  | D6<br>Light Execution | D7 DEEP | D8 DEEP | D9 | D10   | D11          | D12   | D13          |
|------|----------|----------|-----|----|-----|-----------------------|---------|---------|----|-------|--------------|-------|--------------|
| 066  | 125      | 38       | M12 | 18 | M10 | M26x1.5               | M10 20  | M12 18  | 25 | R1/4" | W40x1.25x10a | R1/4" | M26x1.5      |
| 090  | 125      | 38       | M12 | 18 | M10 | M26x1.5               | M10 20  | M12 18  | 25 | R1/4" | W40x1.25x10a | R1/4" | M26x1.5      |
| 130  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 20  | M12 20  | 25 | R1/4" | W50x1.25x10a | R1/4" | 11/16-12 UNF |
| 180  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 20  | M14 25  | 30 | R1/4" | W50x1.25x10a | R1/4" | 11/16-12 UNF |

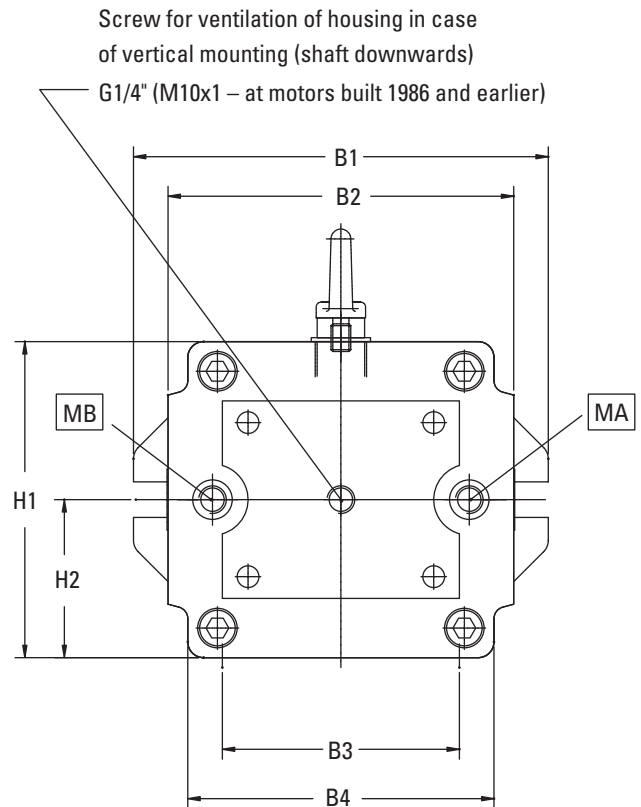

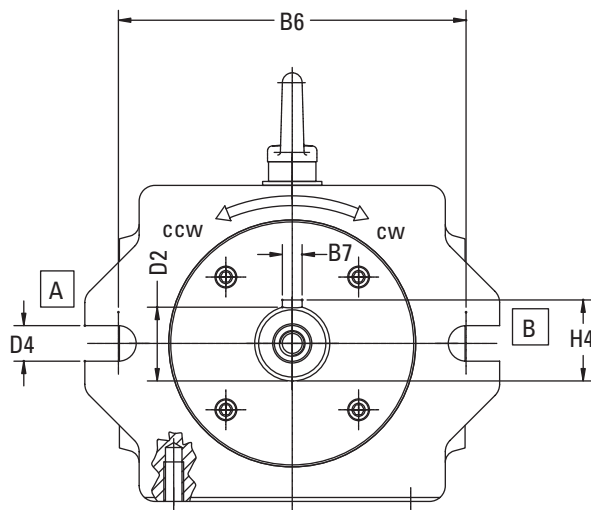
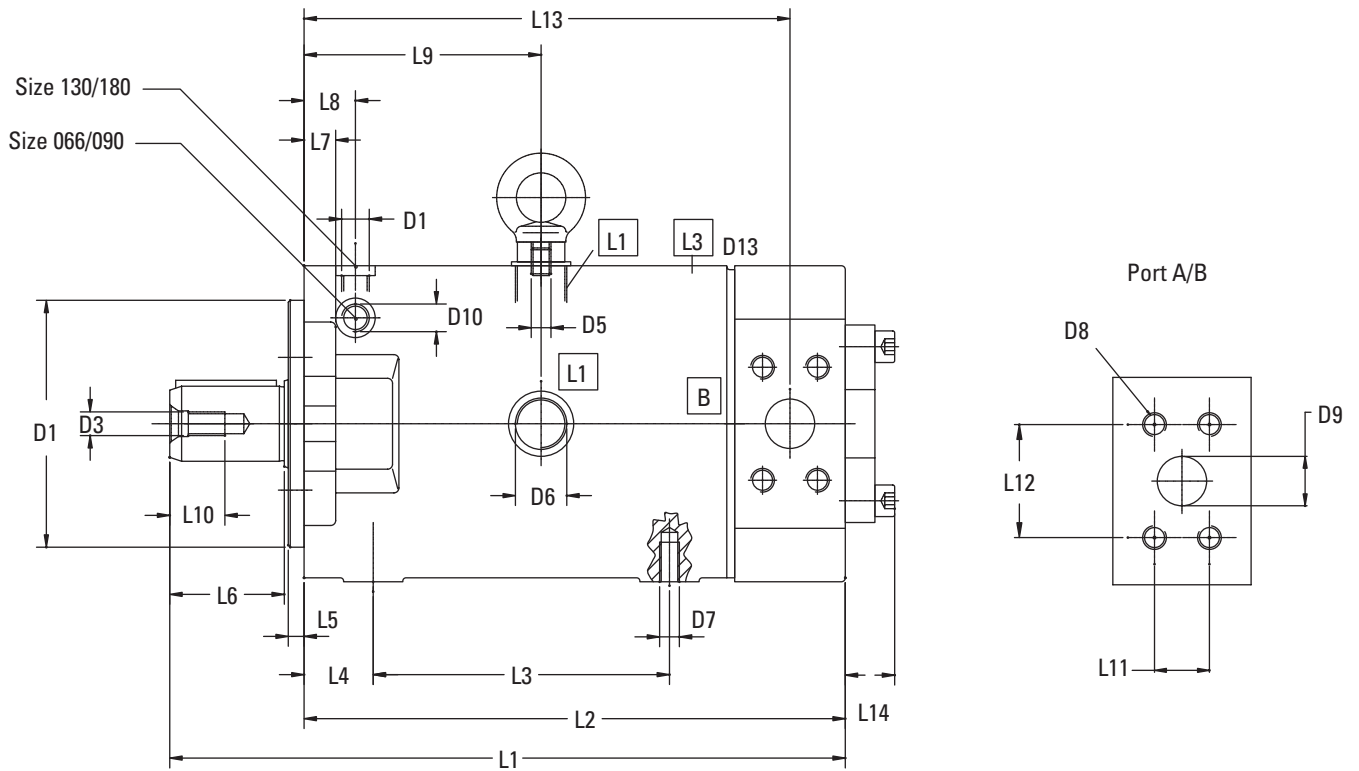


| SIZE | H1  | H2  | H4   |
|------|-----|-----|------|
| 066  | 160 | 80  | 41   |
| 090  | 160 | 80  | 41   |
| 130  | 200 | 100 | 53.5 |
| 180  | 200 | 100 | 53.5 |

| SIZE | L1  | L2  | L3  | L4 | L5 | L6 | L7 | L8 | L9  | L10 | L11  | L12  | L13 | L14 |
|------|-----|-----|-----|----|----|----|----|----|-----|-----|------|------|-----|-----|
| 066  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 246 | —   |
| 090  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 246 | —   |
| 130  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 27.8 | 57.2 | 306 | 26  |
| 180  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 31.8 | 66.7 | 306 | 26  |

# Dimensions - MVXS 066, 090, 130, 180

Displacement Control  
By Electric Motor, ES

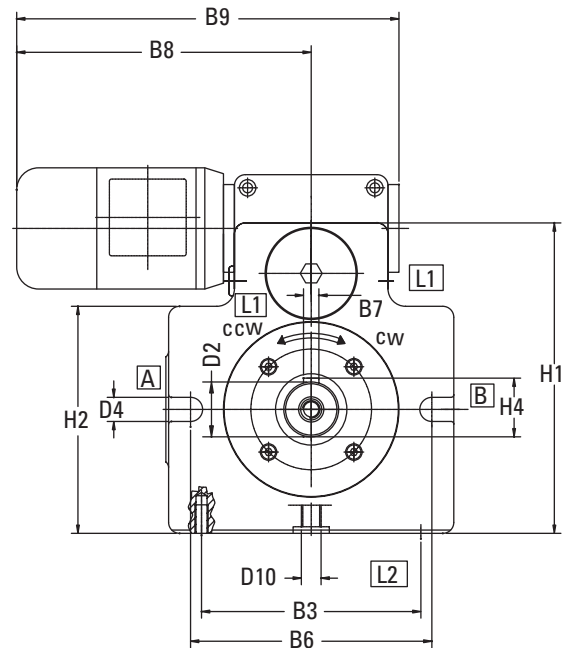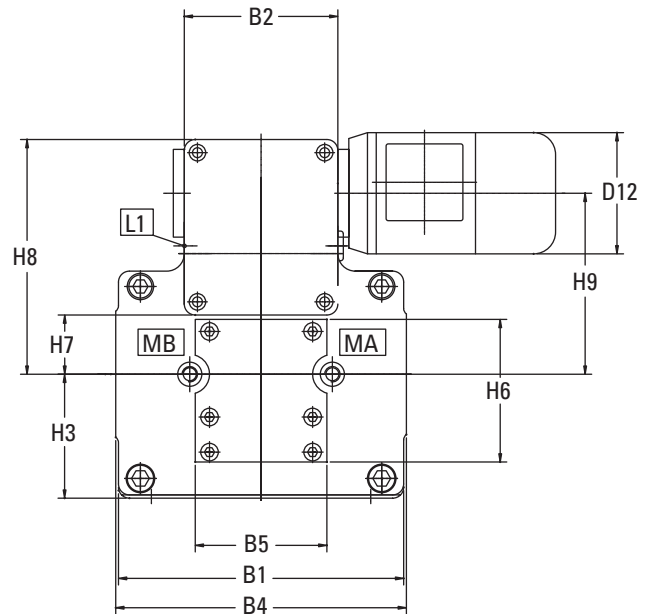


- L1 Two drain ports, one supplied plugged.
- L2 Supplementary drain or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing upwards.
- L3 Oil filling or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing downwards.
- MA Gauge port G1/4"
- MB Gauge port G1/4"



| DIRECTION OF ROTATION | INLET PORT (HIGH PRESSURE SIDE) | OUTLET PORT (LOW PRESSURE SIDE) |
|-----------------------|---------------------------------|---------------------------------|
| Right Hand Rotation   | B                               | A                               |
| Left Hand Rotation    | A                               | B                               |

| SIZE | B1  | B2  | B3  | B4  | B5  | B6  | B7<br>h9 | B8    | B9    |
|------|-----|-----|-----|-----|-----|-----|----------|-------|-------|
| 066  | 210 | 116 | 160 | 235 | 120 | 180 | 10       | 276.5 | 334.5 |
| 090  | 210 | 116 | 160 | 235 | 120 | 180 | 10       | 276.5 | 334.5 |
| 130  | 260 | 140 | 200 | 265 | 120 | 224 | 14       | 288.5 | 368.5 |
| 180  | 260 | 140 | 200 | 265 | 120 | 224 | 14       | 288.5 | 368.5 |


| SIZE | D1<br>h8 | D2<br>k6 | D3  | D4 | D5  | D6<br>Light Execution | D7 DEEP | D8 DEEP | D9 | D10 DEEP   | D11           | D12   | D13<br>SAEJ475 |
|------|----------|----------|-----|----|-----|-----------------------|---------|---------|----|------------|---------------|-------|----------------|
| 066  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 18  | 25 | M18x1.5 12 | VW40x1.25x10a | 110.5 | 7/8-14 UNF     |
| 090  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 20  | 25 | M18x1.5 12 | VW40x1.25x10a | 110.5 | 7/8-14 UNF     |
| 130  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M12 20  | 25 | M18x1.5 12 | VW50x1.25x10a | 110.5 | 11/16-12 UNF   |
| 180  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M14 22  | 30 | M18x1.5 12 | VW50x1.25x10a | 110.5 | 11/16-12 UNF   |

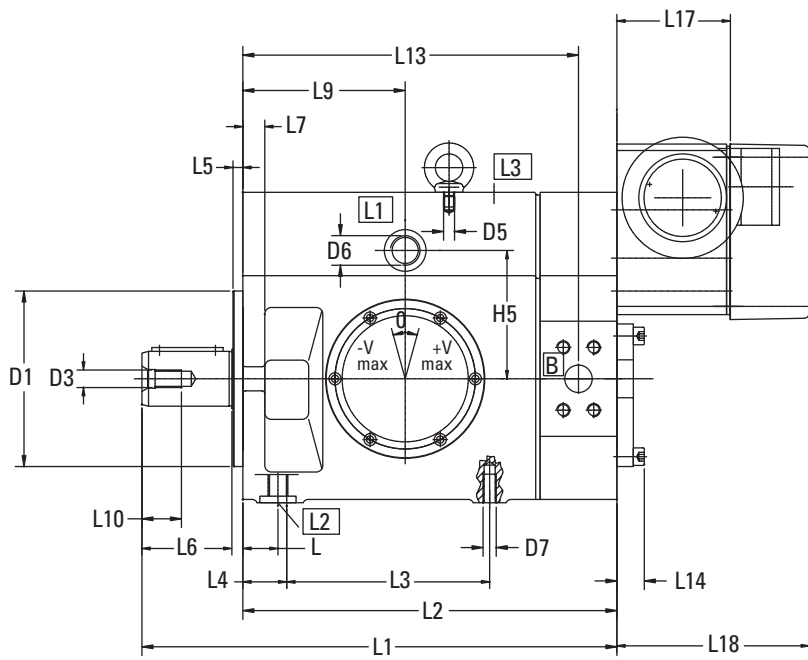

For Splined Data See Table

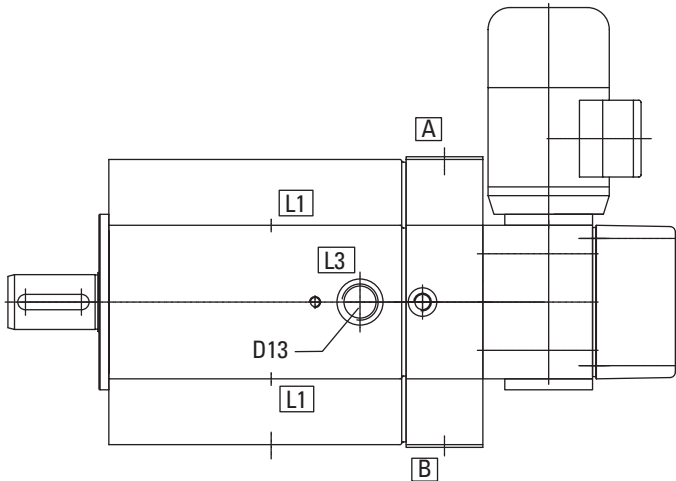

Port A/B




| SIZE | H1  | H2  | H3  | H4   | H5  | H6  | H7   | H8  | H9  |
|------|-----|-----|-----|------|-----|-----|------|-----|-----|
| 066  | 227 | 162 | 90  | 41   | 93  | 130 | 53   | 168 | 122 |
| 090  | 227 | 162 | 90  | 41   | 93  | 130 | 53   | 168 | 122 |
| 130  | 283 | 207 | 113 | 53.5 | 117 | 130 | 58.5 | 214 | 165 |
| 180  | 283 | 207 | 113 | 53.5 | 117 | 130 | 58.5 | 214 | 165 |

| SIZE | L1  | L2  | L3  | L4 | L5 | L6 | L7 | L8 | L9  | L10 | L11  | L12  | L13   | L14 | L15 | L16 | L17 | L18   |
|------|-----|-----|-----|----|----|----|----|----|-----|-----|------|------|-------|-----|-----|-----|-----|-------|
| 066  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 78  | 153.5 |
| 090  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 78  | 153.5 |
| 130  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 27.8 | 57.2 | 306   | 26  | 78  | 68  | 100 | 175.5 |
| 180  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 27.8 | 57.2 | 306   | 26  | 78  | 68  | 100 | 175.5 |

# Dimensions - MVXS 066, 090, 130, 180


## Handwheel Control, HG

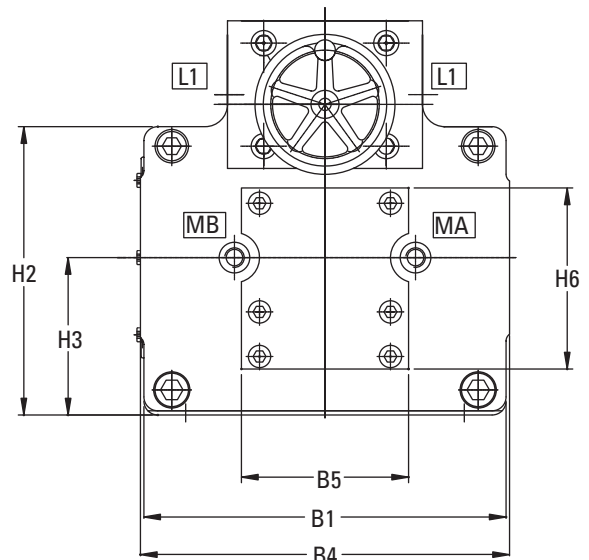

- L1 Two drain ports, one supplied plugged.
- L2 Supplementary drain or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing upwards.
- L3 Oil filling or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing downwards.
- MA Gauge port G1/4"
- MB Gauge port G1/4"

| DIRECTION OF ROTATION | INLET PORT (HIGH PRESSURE SIDE) | OUTLET PORT (LOW PRESSURE SIDE) |
|-----------------------|---------------------------------|---------------------------------|
| Right Hand Rotation   | B                               | A                               |
| Left Hand Rotation    | A                               | B                               |


| SIZE | SAE-FLANGE 6000PSI |
|------|--------------------|
| 066  | 1"                 |
| 090  | 1"                 |
| 130  | 1"                 |
| 180  | 1 1/4"             |

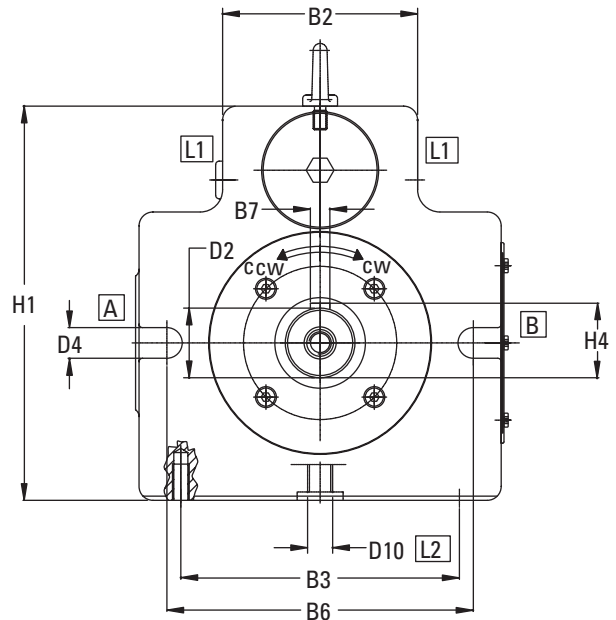


| SIZE | B1  | B2  | B3  | B4  | B5  | B6  | B7<br>h9 |
|------|-----|-----|-----|-----|-----|-----|----------|
| 066  | 210 | 116 | 160 | 235 | 120 | 180 | 10       |
| 090  | 210 | 116 | 160 | 235 | 120 | 180 | 10       |
| 130  | 260 | 140 | 200 | 265 | 120 | 224 | 14       |
| 180  | 260 | 140 | 200 | 265 | 120 | 224 | 14       |

| SIZE | D1<br>h8 | D2<br>k6 | D3  | D4 | D5  | D6<br>Light Execution | D7 DEEP | D8 DEEP | D9 | D10 DEEP   | D11          | D12<br>SAEJ475 |
|------|----------|----------|-----|----|-----|-----------------------|---------|---------|----|------------|--------------|----------------|
| 066  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 18  | 25 | M18x1.5 12 | W40x1.25x10a | 7/8-14 UNF     |
| 090  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 20  | 25 | M18x1.5 12 | W40x1.25x10a | 7/8-14 UNF     |
| 130  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M12 20  | 25 | M18x1.5 12 | W50x1.25x10a | 11/16-12 UNF   |
| 180  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M14 22  | 30 | M18x1.5 12 | W50x1.25x10a | 11/16-12 UNF   |




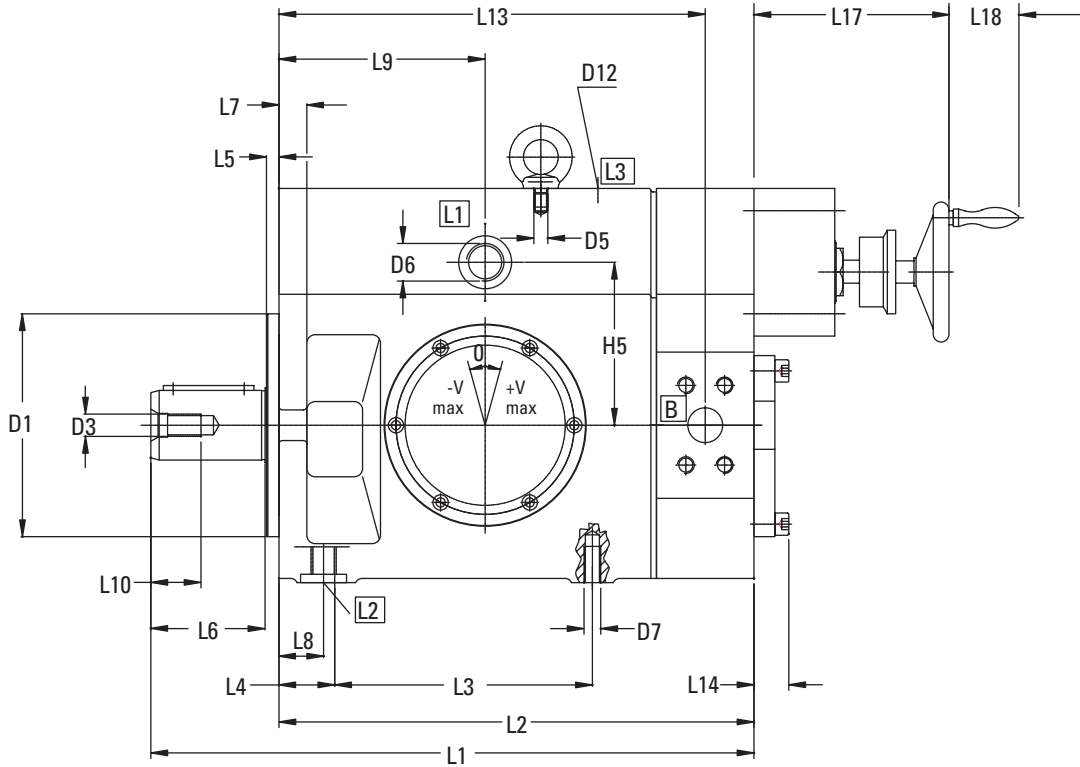

For Splined Data See Table



Port A/B




| SIZE | H1  | H2  | H3  | H4   | H5  | H6  |
|------|-----|-----|-----|------|-----|-----|
| 066  | 227 | 162 | 90  | 41   | 93  | 130 |
| 090  | 227 | 162 | 90  | 41   | 93  | 130 |
| 130  | 283 | 207 | 113 | 53.5 | 117 | 130 |
| 180  | 283 | 207 | 113 | 53.5 | 117 | 130 |

| SIZE | L1  | L2  | L3  | L4 | L5 | L6 | L7 | L8 | L9  | L10 | L11  | L12  | L13   | L14 | L15 | L16 | L17 | L18 |
|------|-----|-----|-----|----|----|----|----|----|-----|-----|------|------|-------|-----|-----|-----|-----|-----|
| 066  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 130 | 46  |
| 090  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 130 | 46  |
| 130  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 27.8 | 57.2 | 306   | 26  | 78  | 68  | 130 | 46  |
| 180  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 31.8 | 66.2 | 306   | 26  | 78  | 68  | 130 | 46  |

# Dimensions - MVXS 066, 090, 130, 180


## Adjustment Screw Control, FE

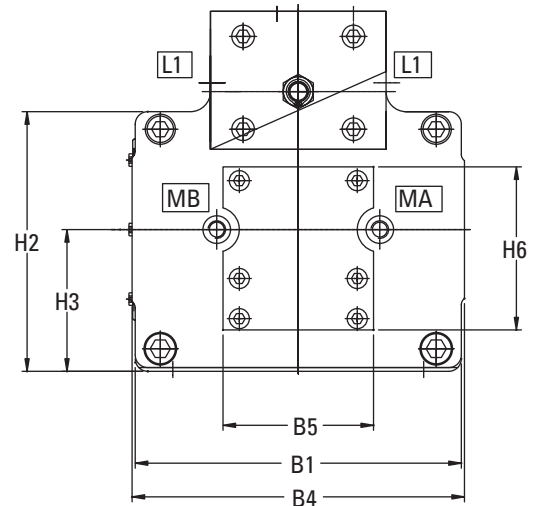

- L1 Two drain ports, one supplied plugged.
- L2 Supplementary drain or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing upwards.
- L3 Oil filling or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing downwards.
- MA Gauge port G1/4"
- MB Gauge port G1/4"


| DIRECTION OF ROTATION | INLET PORT (HIGH PRESSURE SIDE) | OUTLET PORT (LOW PRESSURE SIDE) |
|-----------------------|---------------------------------|---------------------------------|
| Right Hand Rotation   | B                               | A                               |
| Left Hand Rotation    | A                               | B                               |

| SIZE | SAE-FLANGE 6000PSI |
|------|--------------------|
| 066  | 1"                 |
| 090  | 1"                 |
| 130  | 1"                 |
| 180  | 1 1/4"             |

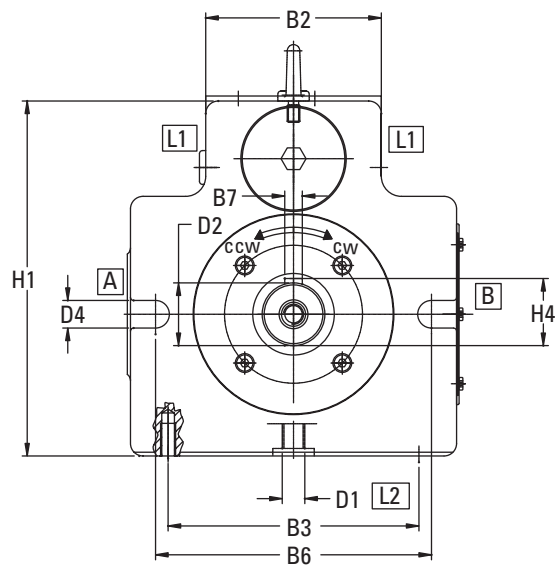

| SIZE | B1  | B2  | B3  | B4  | B5  | B6  | B7<br>h9 |
|------|-----|-----|-----|-----|-----|-----|----------|
| 066  | 210 | 116 | 160 | 235 | 120 | 180 | 10       |
| 090  | 210 | 116 | 160 | 235 | 120 | 180 | 10       |
| 130  | 260 | 140 | 200 | 265 | 120 | 224 | 14       |
| 180  | 260 | 140 | 200 | 265 | 120 | 224 | 14       |

| SIZE | D1<br>h8 | D2<br>k6 | D3  | D4 | D5  | D6<br>Light Execution | D7 DEEP | D8 DEEP | D9 | D10 DEEP   | D11          | D12<br>SAEJ475 |
|------|----------|----------|-----|----|-----|-----------------------|---------|---------|----|------------|--------------|----------------|
| 066  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 18  | 25 | M18x1.5 12 | W40x1.25x10a | 7/8-14 UNF     |
| 090  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 20  | 25 | M18x1.5 12 | W40x1.25x10a | 7/8-14 UNF     |
| 130  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M12 20  | 25 | M18x1.5 12 | W50x1.25x10a | 11/16-12 UNF   |
| 180  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M14 22  | 30 | M18x1.5 12 | W50x1.25x10a | 11/16-12 UNF   |

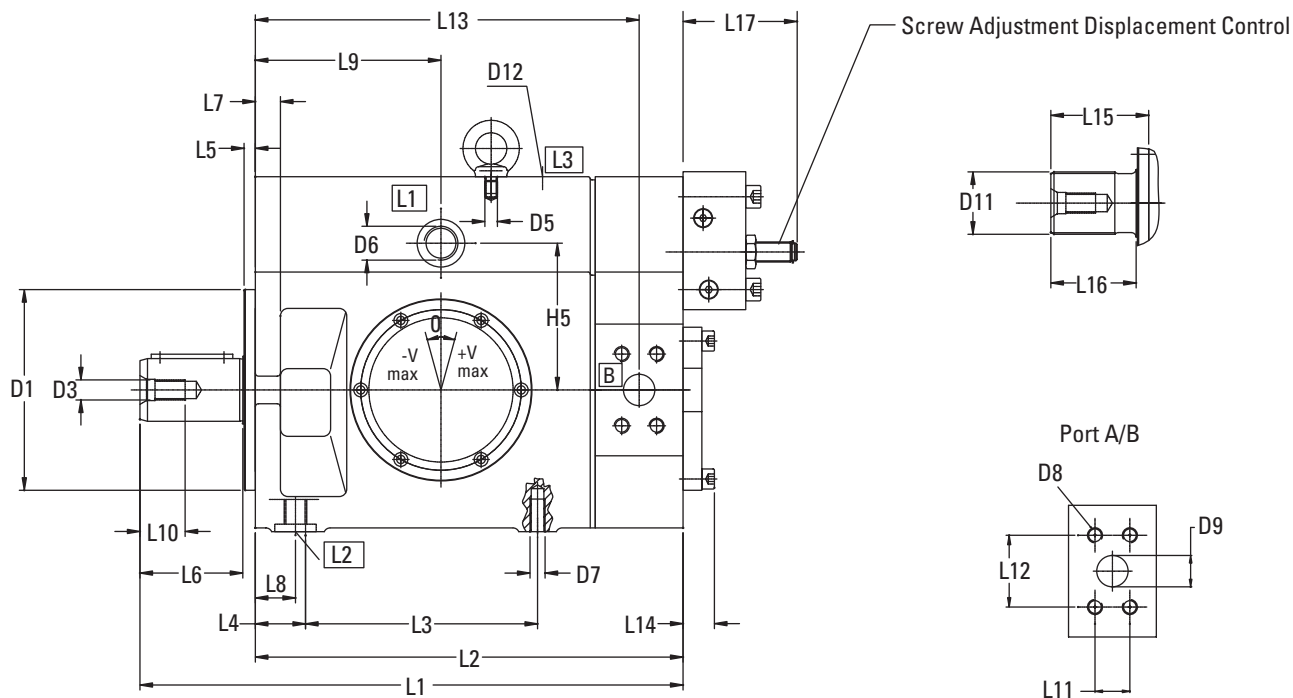


| SIZE | H1  | H2  | H3  | H4   | H5  | H6  |
|------|-----|-----|-----|------|-----|-----|
| 066  | 227 | 162 | 90  | 41   | 93  | 130 |
| 090  | 227 | 162 | 90  | 41   | 93  | 130 |
| 130  | 283 | 207 | 113 | 53.5 | 117 | 130 |
| 180  | 283 | 207 | 113 | 53.5 | 117 | 130 |

| SIZE | L1  | L2  | L3  | L4 | L5 | L6 | L7 | L8 | L9  | L10 | L11  | L12  | L13   | L14 | L15 | L16 | L17 |
|------|-----|-----|-----|----|----|----|----|----|-----|-----|------|------|-------|-----|-----|-----|-----|
| 066  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 90  |
| 090  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 90  |
| 130  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 27.8 | 57.2 | 306   | 26  | 78  | 68  | 90  |
| 180  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 31.8 | 66.2 | 306   | 26  | 78  | 68  | 90  |

# Dimensions - MVXS 066, 090, 130, 180


Pressure Signal  
Displacement Control, DP

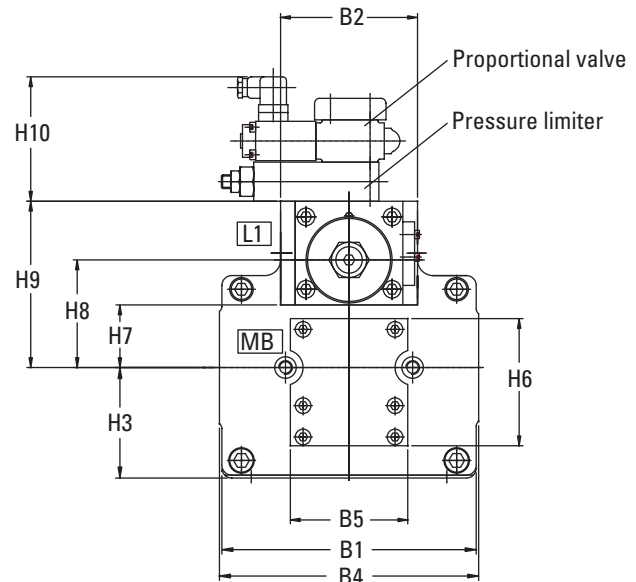

- T Return line of control circuit G1/2"
- L1 Two drain ports, one supplied plugged.
- L2 Supplementary drain or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing upwards.
- L3 Oil filling or bleed plug. Must be drained in addition to L1 if the pump is installed with the shaft input end pointing downwards.
- MA Gauge port system pressure G1/4"
- MB Gauge port system pressure G1/4"


| DIRECTION OF ROTATION | INLET PORT (HIGH PRESSURE SIDE) | OUTLET PORT (LOW PRESSURE SIDE) |
|-----------------------|---------------------------------|---------------------------------|
| Right Hand Rotation   | B                               | A                               |
| Left Hand Rotation    | A                               | B                               |

| SIZE | SAE-FLANGE 6000PSI |
|------|--------------------|
| 066  | 1"                 |
| 090  | 1"                 |
| 130  | 1"                 |
| 180  | 1 1/4"             |

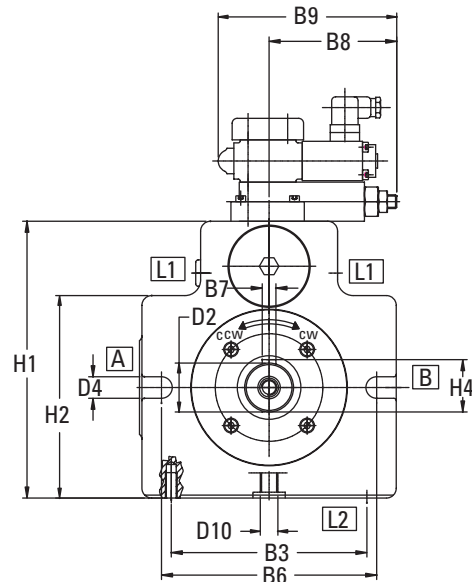

| SIZE | B1  | B2  | B3  | B4  | B5  | B6  | B7<br>h9 | B8    | B9    |
|------|-----|-----|-----|-----|-----|-----|----------|-------|-------|
| 066  | 210 | 116 | 160 | 235 | 120 | 180 | 10       | 130.5 | 182.5 |
| 090  | 210 | 116 | 160 | 235 | 120 | 180 | 10       | 130.5 | 182.5 |
| 130  | 260 | 140 | 200 | 265 | 120 | 224 | 14       | 130.5 | 182.5 |
| 180  | 260 | 140 | 200 | 265 | 120 | 224 | 14       | 130.5 | 182.5 |

| SIZE | D1<br>h8 | D2<br>k6 | D3  | D4 | D5  | D6<br>Light Execution | D7 DEEP | D8 DEEP | D9 | D10 DEEP   | D11          | D12 | D13<br>SAEJ475 |
|------|----------|----------|-----|----|-----|-----------------------|---------|---------|----|------------|--------------|-----|----------------|
| 066  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 18  | 25 | M18x1.5 12 | W40x1.25x10a | 64  | 7/8-14 UNF     |
| 090  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 20  | 25 | M18x1.5 12 | W40x1.25x10a | 64  | 7/8-14 UNF     |
| 130  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M12 20  | 25 | M18x1.5 12 | W50x1.25x10a | 88  | 1 1/16-12 UNF  |
| 180  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M14 22  | 30 | M18x1.5 12 | W50x1.25x10a | 88  | 1 1/16-12 UNF  |

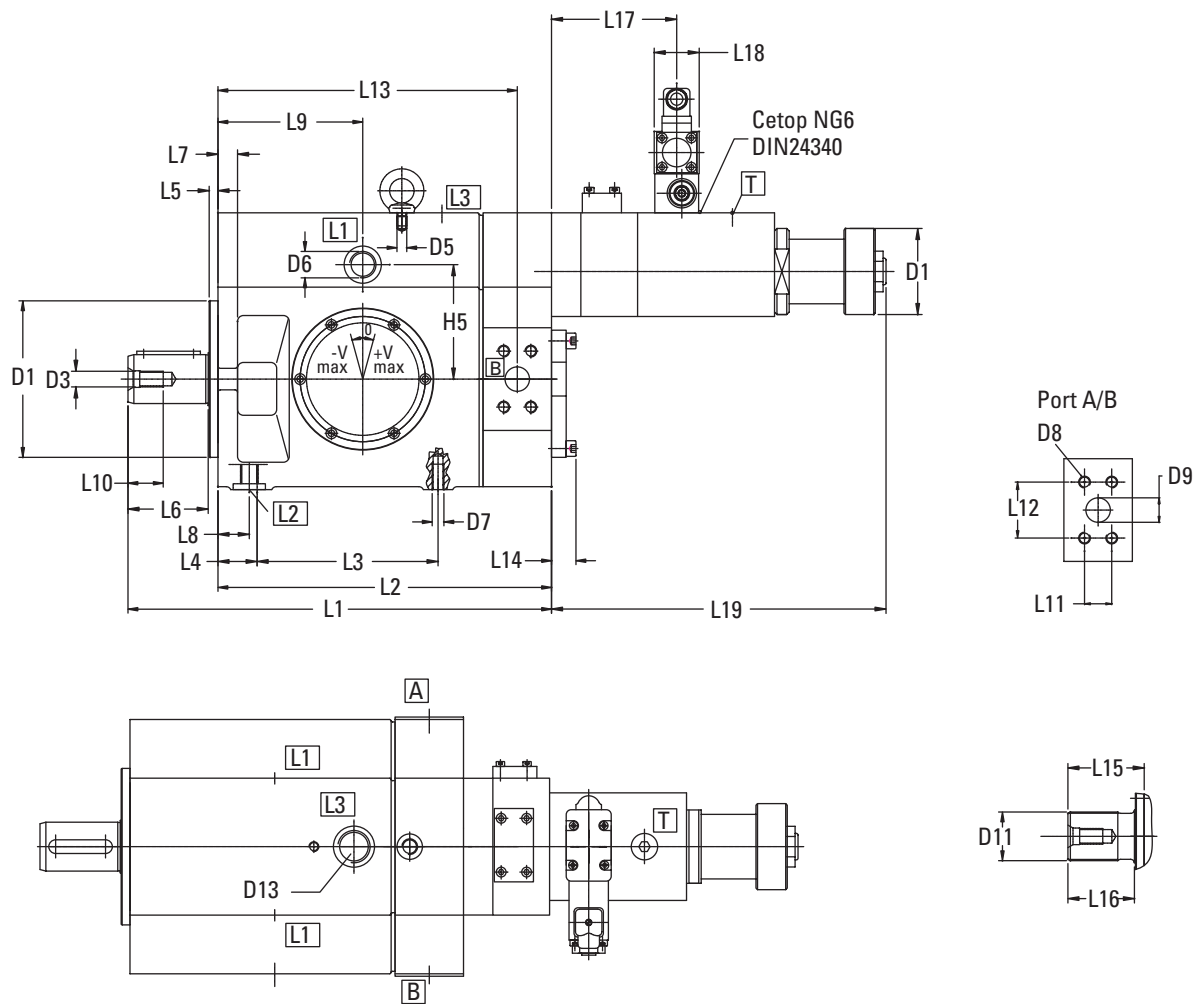


| SIZE | H1  | H2  | H3  | H4   | H5  | H6  | H7 | H8  | H9  | H10 |
|------|-----|-----|-----|------|-----|-----|----|-----|-----|-----|
| 066  | 227 | 162 | 90  | 41   | 93  | 130 | 53 | 88  | 137 | 127 |
| 090  | 227 | 162 | 90  | 41   | 93  | 130 | 53 | 88  | 137 | 127 |
| 130  | 283 | 207 | 113 | 53.5 | 117 | 130 | 64 | 110 | 170 | 127 |
| 180  | 283 | 207 | 113 | 53.5 | 117 | 130 | 64 | 110 | 170 | 127 |

| SIZE | L1  | L2  | L3  | L4 | L5 | L6 | L7 | L8 | L9  | L10 | L11  | L12  | L13   | L14 | L15 | L16 | L17 | L18 | L19 |
|------|-----|-----|-----|----|----|----|----|----|-----|-----|------|------|-------|-----|-----|-----|-----|-----|-----|
| 066  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 104 | 46  | 267 |
| 090  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 104 | 46  | 267 |
| 130  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 27.8 | 57.2 | 306   | 26  | 78  | 68  | 128 | 46  | 342 |
| 180  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 31.8 | 66.7 | 306   | 26  | 78  | 68  | 128 | 46  | 342 |

# Dimensions - MVXS 066, 090, 130, 180


**Electro Hydraulic  
Displacement Control, SP**

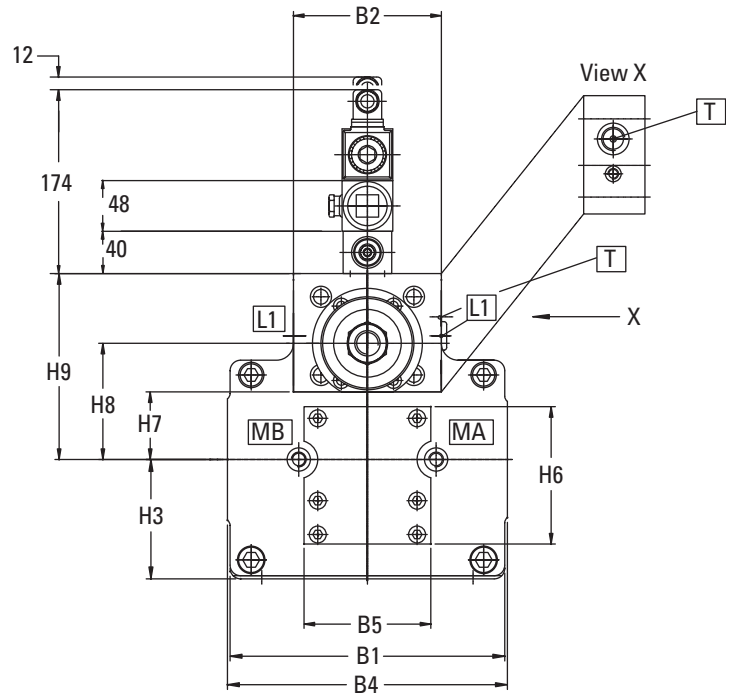

- [A] System pressure port (see detail)
- [B] System pressure port (see detail)
- [L1] Two drain ports, one supplied plugged.
- [L2] Supplementary drain or bleed plug. Must be drained in addition to [L1] if the pump is installed with the shaft input end pointing upwards.
- [L3] Oil filling or bleed plug. Must be drained in addition to [L1] if the pump is installed with the shaft input end pointing downwards.
- [MA] Gauge port system pressure G1/4"
- [MB] Gauge port system pressure G1/4"
- [MSt] Gauge port pilot pressure G1/4"
- [PSt2] Pilot pressure port G1/2"
- [T] Return line of control circuit G1/2"
- (...) Normally plugged



| DIRECTION OF ROTATION | INLET PORT (HIGH PRESSURE SIDE) | OUTLET PORT (LOW PRESSURE SIDE) |
|-----------------------|---------------------------------|---------------------------------|
| Right Hand Rotation   | B                               | A                               |
| Left Hand Rotation    | A                               | B                               |

| SIZE | SAE-FLANGE 6000PSI |
|------|--------------------|
| 066  | 1"                 |
| 090  | 1"                 |
| 130  | 1"                 |
| 180  | 1 1/4"             |

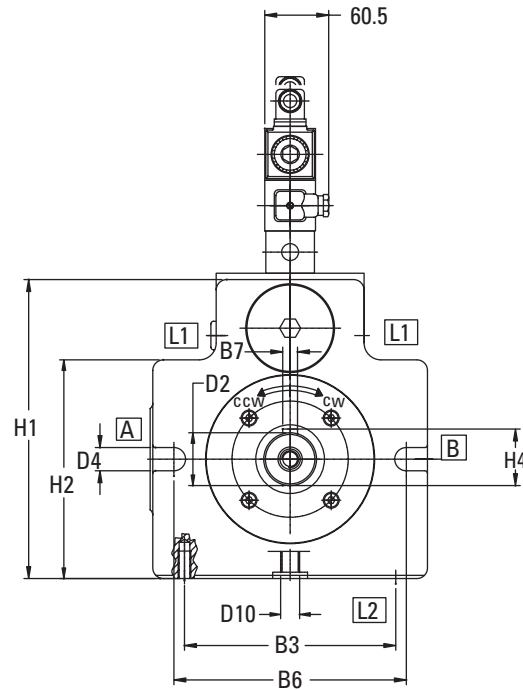


| SIZE | B1  | B2  | B3  | B4  | B5  | B6  | B7<br>h9 |
|------|-----|-----|-----|-----|-----|-----|----------|
| 066  | 210 | 116 | 160 | 235 | 120 | 180 | 10       |
| 090  | 210 | 116 | 160 | 235 | 120 | 180 | 10       |
| 130  | 260 | 140 | 200 | 265 | 120 | 224 | 14       |
| 180  | 260 | 140 | 200 | 265 | 120 | 224 | 14       |

| SIZE | D1<br>h8 | D2<br>k6 | D3  | D4 | D5  | D6<br>Light Execution | D7 DEEP | D8 DEEP | D9 | D10 DEEP   | D11          | D12<br>SAEJ475 |
|------|----------|----------|-----|----|-----|-----------------------|---------|---------|----|------------|--------------|----------------|
| 066  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 18  | 25 | M18x1.5 12 | W40x1.25x10a | 7/8-14 UNF     |
| 090  | 125      | 38       | M12 | 18 | M10 | M22x1.5               | M10 20  | M12 20  | 25 | M18x1.5 12 | W40x1.25x10a | 7/8-14 UNF     |
| 130  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M12 20  | 25 | M18x1.5 12 | W50x1.25x10a | 1 1/16-12 UNF  |
| 180  | 160      | 50       | M16 | 22 | M10 | M26x1.5               | M12 26  | M14 22  | 30 | M18x1.5 12 | W50x1.25x10a | 1 1/16-12 UNF  |

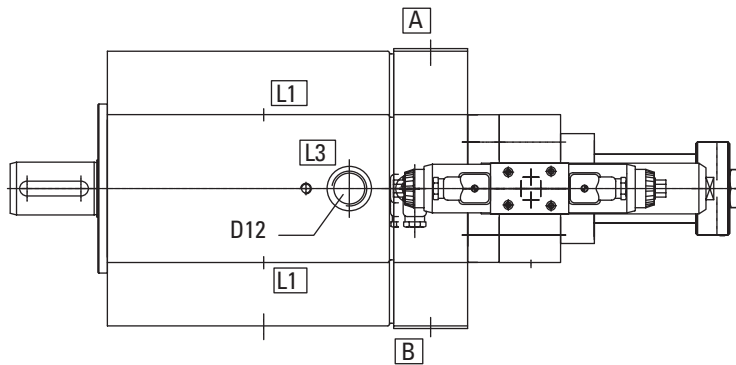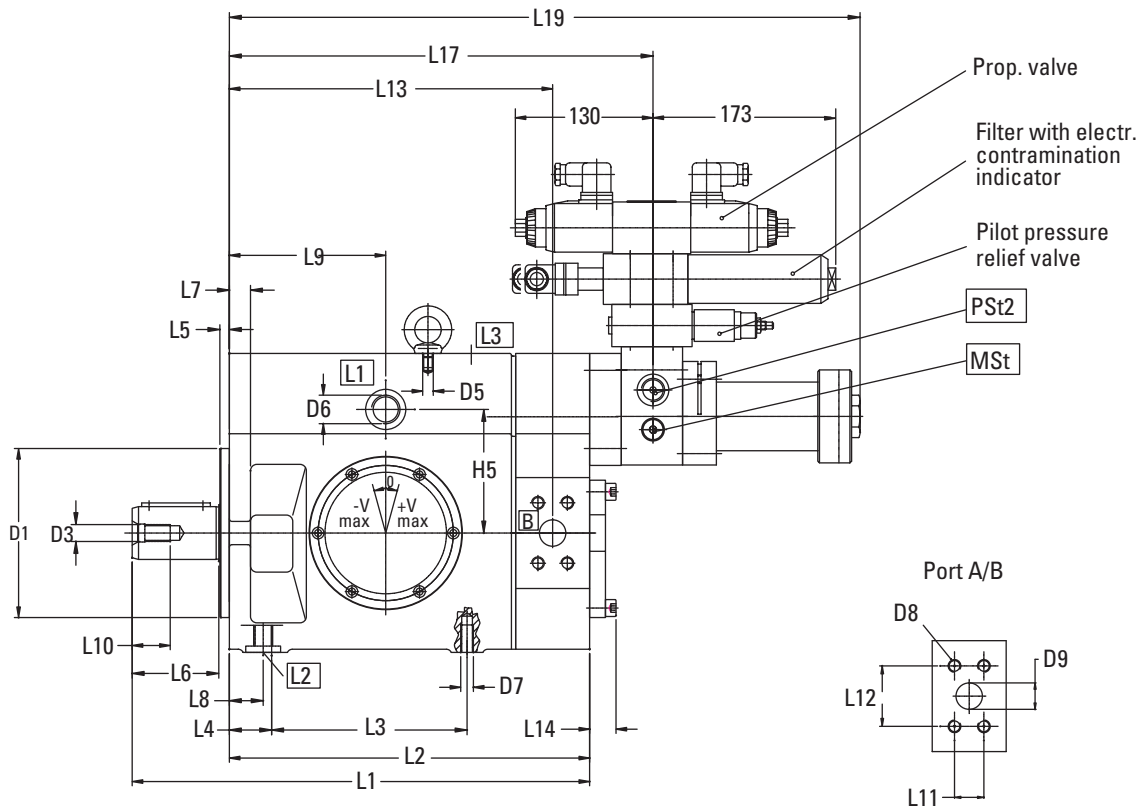

For Splined Data See Table



| SIZE | H1  | H2  | H3  | H4   | H5  | H6  | H7 | H8  | H9  |
|------|-----|-----|-----|------|-----|-----|----|-----|-----|
| 066  | 227 | 162 | 90  | 41   | 93  | 130 | 53 | 88  | 143 |
| 090  | 227 | 162 | 90  | 41   | 93  | 130 | 53 | 88  | 143 |
| 130  | 283 | 207 | 113 | 53.5 | 117 | 130 | 64 | 110 | 176 |
| 180  | 283 | 207 | 113 | 53.5 | 117 | 130 | 64 | 110 | 176 |

| SIZE | L1  | L2  | L3  | L4 | L5 | L6 | L7 | L8 | L9  | L10 | L11  | L12  | L13   | L14 | L15 | L16 | L17 | L18 | L19 |
|------|-----|-----|-----|----|----|----|----|----|-----|-----|------|------|-------|-----|-----|-----|-----|-----|-----|
| 066  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 328 | 501 |     |
| 090  | 342 | 274 | 150 | 35 | 8  | 58 | 16 | 26 | 120 | 28  | 27.8 | 57.2 | 245.6 | 25  | 68  | 58  | 328 | 501 |     |
| 130  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 27.8 | 57.2 | 306   | 26  | 78  | 68  | 401 | 597 |     |
| 180  | 433 | 341 | 185 | 40 | 9  | 82 | 20 | 32 | 148 | 36  | 31.8 | 66.7 | 306   | 26  | 78  | 68  | 401 | 597 |     |


# Installation Data

## Installation position

### Shaft horizontal

Highest drain port is to be used. Drain line must be arranged in such a way that motor housing is kept full at all times. If necessary, the drain line is to be looped above the motor.

## Drain piping




### Note:

Drain piping shown, with respect to installation positions, is required for proper bearing lubrication. Also, see case flushing information next page.


### Shaft down

Use venting port L3 (provided only on request). Pre-load drain port L1 with 0,2 bar (3 psi).

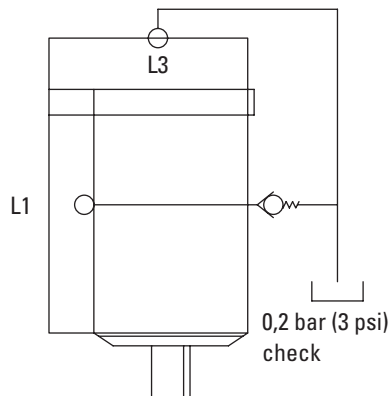

### Shaft up

Use venting port L2. Pre-load drain port L1 with 0,2 bar (3 psi).

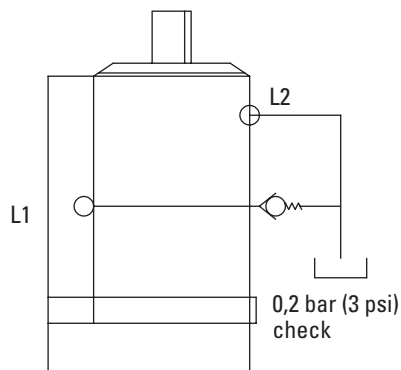



# Application Data - Fluid Recommendations

## Case flushing requirements

A check valve must not be used in the drain pipe. The drain pipe must interminate below the oil level in the reservoir.

For all other conditions with low pressure <20 bar (<300 psi) and low flow (<10% of Qmax) case flushing is required.

For operation with special fluids, HFB and HFC, case flushing is recommended.

## Flushing flow

Flushing flow via the motor case should be >1% of maximum flow. Maximum flushing flow depends on case pressure.

## Notes:

- All listed ratings are based on the use of a good quality fluid.
- Alternative fluids have a reduced tolerance for contamination over petroleum-based fluids. Good filtration is therefore critical.
- The motors will provide exceptional life when used with a good quality clean fluid at the motor's rating specified for that fluid.

## Fluids

Motors in the catalog are primarily designed to operate with conventional petroleum-based hydraulic oil. Alternative fluids and restrictions:

- Fluid maintenance is critical to the durability of all hydraulic components, and particularly so with hydraulic motors. This becomes even more of a factor when alternative fluids are used. All types of alternative fluids require extensive maintenance in order to maintain proper levels of water content, acidity, viscosity and contamination.

## Fluid Cleanliness

These motors are rated for anti-wear petroleum fluids with a contamination level of 18/15/13 per ISO 4406. Operation in fluids with higher contaminate levels is not recommended, and may

reduce the life of the motor's components. Fluids other than petroleum, severe service cycles, or extreme temperatures are cause for adjustment of these codes. Please contact your Eaton representative for special duty cycle recommendations.

Eaton motors, as well as any variable displacement piston motors, will operate with apparent satisfaction in fluids up to the rating specified here. Experience has shown, however, that motor and hydraulic systems lives are not optimized with high fluid contamination levels (high ISO cleanliness codes).

Proper fluid condition is essential for a long and satisfactory life of hydraulic components and systems. Hydraulic fluid must have the correct balance of cleanliness, materials, and additives for protection against wear of inclusion of air.

Essential information on the correct methods for treating hydraulic fluid is included in Eaton publication 561 - "Vickers Guide to Systemic Contamination Control" - available from your local Eaton distributor.

In this publication, filtration and cleanliness levels for extending the life of axial piston motors and other system components are listed. Included is an excellent discussion of the selection of products needed to control fluid condition.

## Ordering procedure

When ordering, please specify full model designation of items required; see "Model Codes" section of this catalog.

Note the following:

- Designation of variable displacement motors must include the supplementary designation of the required control type.

## FLUIDS

| TYPE                  | CLASSIFICATION | MAX. PRESSURE BAR | MAX. SPEED RPM | RECOMMENDED SEAL MATERIAL | MAX OPERATING TEMPERATURE °C | BEARING LIFE |
|-----------------------|----------------|-------------------|----------------|---------------------------|------------------------------|--------------|
| Oil in Water Emulsion | HFAE           | Not Rated         |                |                           |                              | 0            |
| Water in Oil Emulsion | HFB            | 250               | 1800           | Fluorocarbon              | 49                           | 50%          |
| Water Glycol          | HFC            | 250               | 1800           | Fluorocarbon              | 49                           | 25%          |
| Phosphate Ester       | HFDR           | 350/420           | 1800           | Fluorocarbon              | 66                           | 100%         |
| Polyol Ester          | HFDU           | 350/420           | 1800           | Fluorocarbon              | 66                           | 100%         |

**Eaton**  
14615 Lone Oak Road  
Eden Prairie, MN 55344  
USA  
Tel: 952 937-9800  
Fax: 952 974-7722  
[www.hydraulics.eaton.com](http://www.hydraulics.eaton.com)

**Eaton**  
20 Rosamond Road  
Footscray  
Victoria 3011  
Australia  
Tel: (61) 3 9319 8222  
Fax: (61) 3 9318 5714

**Eaton**  
Dr.-Reckeweg-Str. 1  
D-76532 Baden-Baden  
Germany  
Tel: +49 (07221) 682-0  
Fax: +49 (07221) 682-788

**VICKERS**<sup>®</sup>



**Vickers**

© 2003 Eaton Corporation  
All rights reserved  
Printed in USA  
Document No. V-MOPI-MC001-E  
March 2003