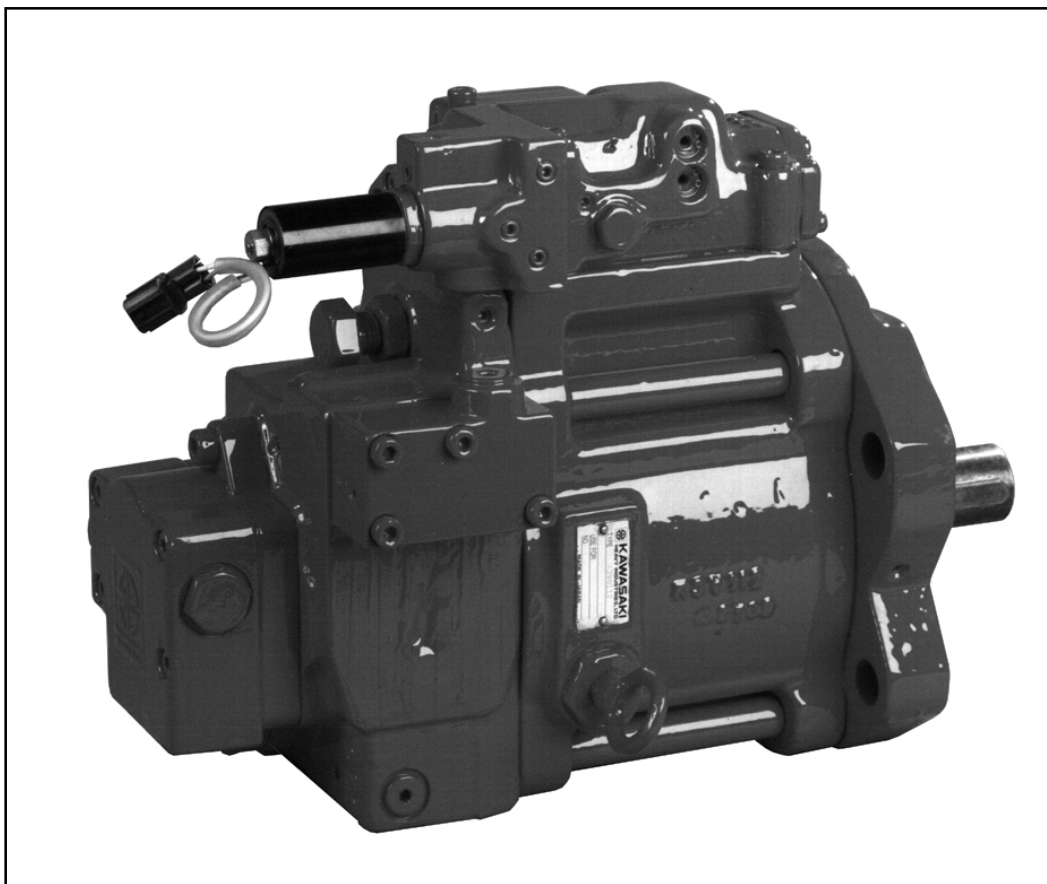


Sizes 63, 112, 180,  
280, 180DT & 280DT  
Up to 510 kW and  
350bar @1500 rpm

Swash-plate  
Axial Piston Pump  
Series K3VG

Data Sheet  
P-1001/03.04  
GB



#### Features

- ◇ Reliable, High Pressure, Long Life Modular Design.
- ◇ Low Noise and High Efficiency.
- ◇ Self-Compensating piston return mechanism.
- ◇ Extensive Range of Highly Responsive Control Options.
- ◇ Auxiliary Gear Pump Option.
- ◇ Rated Pressure 350 Bar.
- ◇ Peak Pressure 400 Bar.
- ◇ High Continuous Power Rating.
- ◇ Fully Balanced Spherical Valve Plate.
- ◇ Infinite displacement control.
- ◇ Hydrostatically Balanced Swash Plate Support.
- ◇ High Load Capacity Bearings.

#### General Description

The K3VG Series Swash Plate Type Axial Piston Pumps are designed to specifically satisfy the industrial open circuit market where noise, efficiency, controllability and extended pump life are considered to be essential. K3VG Pumps are available in nominal displacements ranging from 63 to 560 cm<sup>3</sup>/rev with various pressure, displacement, and combination load sensing control options.



Model  
K3VG

Page  
1.34

Data Sheet  
P-1001/03.04

**Technical Data**

For applications outside the following parameters, please consult Kawasaki Precision Machinery (UK) Ltd.

**Hydraulic Data**

## Pressure Fluid

Mineral oil, phosphate ester, fatty acid ester and water glycol.  
Phosphate ester is only suitable for use with FPM seals.

Use a high quality, anti-wear; mineral based hydraulic fluid when the pressure exceeds 207 bar. In applications where fire resistant fluids are required consult Kawasaki Precision Machinery (UK) Ltd.  
The following chart illustrates the effects on pump life when non-standard fluids are used:

	Fluid Type			
	Mineral Oil	Phosphate Ester	Polyol Ester	Water Glycol*
Maximum continuous Pressure (bar)	350			207
Temperature Range (°C)	-20 ~ +80	0 ~ +60	0 ~ +60	10~50
Cavitation Resistance	#	●	●	●
Percentage pump life compared to mineral oil	100	60~100	50~100	20~80

# = Optimum

● = Acceptable but with reduced pump life

\* = DO NOT EXCEED THE RATED SPEED. Maximum speed for 280cc pumps using water glycol is 1500 rpm.

## System cleanliness

Maximum permissible degree of contamination of fluid is to NAS 1638 class 9 or ISO 4466/1986 code 18/15. Kawasaki recommend a filter with a retention rate of  $\beta_{10} \geq 75$ .

## Viscosity Range

Nominal operating range 10 to 200 cSt (For fluids over 200 cSt contact Kawasaki Precision Machinery (UK) Ltd).

Model  
K3VG

Page  
2.34

Data Sheet  
P-1001/03.04



**Technical Data (continued)**

For applications outside the following parameters, please consult Kawasaki Precision Machinery (UK) Ltd.

Pump Model		63	112	180	280	180DT	280DT
Displacement	cm <sup>3</sup> /rev	63	112	180	280	360	560
Rated Pressure <sup>(1)</sup>	bar	350	350	350	350	350	350
Peak Pressure <sup>(2)</sup>	bar	400	400	400	400	400	400
Rated Power (kW)		70	125	200	255	405	510
Max Flow (@ rated speed)	l/min	106	193	310	390	621	780
Rated Speeds at suction pressures >or = to -0.1 bar	rpm	1800	1800	1800	1500	1800	1500
Maximum operating Speeds at suction pressures >or = to +1 bar	rpm	3250	2700	2300	2000	2300	2000
Mass	kg	48	68	86	160	160	300

**NOTES:** <sup>(1)</sup> Pressure at which life and durability of the pump will not be affected.

<sup>(2)</sup> Pressure at which functionality of pump is not affected but life and durability will be shortened. Please contact Kawasaki for recommendations.

**CAUTIONS!**

1. Make sure the pump case is filled with clean, filtered fluid of the type used in the system before operation.
2. The pump case must be full at all times to ensure lubrication of the internal components.
3. When installing the tandem pumps (K3VG180DT and K3VG280DT) make sure that both the front and rear pumps are filled with oil through both case drain ports.

**Ordering Code – K3VG Series Variable Displacement, Axial Piston, Open Loop Pump**

K3VG	180DT	-	1	O	N	R	S	-	1PM1	0	1
------	-------	---	---	---	---	---	---	---	------	---	---

**K3VG Series Pump****Maximum displacement**

Single type:

63                    63 cm<sup>3</sup>/rev112                   112 cm<sup>3</sup>/rev180                   180 cm<sup>3</sup>/rev280                   280 cm<sup>3</sup>/rev

Tandem type:

180DT              360 cm<sup>3</sup>/rev280DT              560 cm<sup>3</sup>/rev**Hydraulic Fluid Type**

-	Mineral oil
W	Water glycol
Z	Phosphate ester

**Circuit type**

1	Open Loop
---	-----------

**Gear Pumps, Gear Pump mounting provision and Pressure Assist Options**

- 0 Without gear pump. Without pressure assist port
- 1 10 cm<sup>3</sup>/rev with built in relief valve 40 bar setting (50 bar max) (not available on tandem)
- 2 15 cm<sup>3</sup>/rev with built in relief valve 40 bar setting (50 bar max) (not available on tandem)
- 3 Without gear pump, with pressure assist port
- 6 With pressure assist port. With mounting provision for customer supplied gear pump with SAE 'A' mounting and 13 tooth spline. (refer to page 27)
- H With pressure assist port. With mounting provision for customer supplied gear pump with SAE 'A' mounting and 9 tooth spline (refer to page 27)
- 7 Without pressure assist port. With mounting provision for customer supplied gear pump with SAE 'A' mounting and 13 tooth spline. (refer to page 27)
- G Without pressure assist port. With mounting provision for customer supplied gear pump with SAE 'A' mounting and 9 tooth spline (refer to page 27)
- A SAE 'B' mounting provision for 280, 180DT and 280DT only (refer to page 27)

**Auxilliary Gear Pump (Tandem Units only)**

Blank	Without pump
1	With pump:

(Refer to gear pump arrangements on Page 5)

**Confluent Block (Tandem Units only)**

Blank	Single pump
0:	Tandem Pumps without confluent block
R:	Rear Outlet Type
S:	Side Outlet Type

**Regulator Ordering Code**

See Page 5.

**Mounting Orientation**

-	Standard Horizontal Mounting
V	Vertical Mounting (shaft up only)

**Series**

S	Low Pulsation (Standard)
---	--------------------------

**Direction of Rotation (Viewed from shaft end)**

R	Clockwise
L	Counterclockwise (Tandem only)

**Mounting Bracket/Port Flanges**

N:	No bracket, no flange
O:	Without bracket, with flange
F:	With bracket, with flange
B:	With bracket, without flange


**Kawasaki**  
 Hydraulic Products

 Model  
 K3VG

 Page  
 4.34

 Data Sheet  
 P-1001/03.04

## Ordering Code – Regulator

1	P	M	1
---	---	---	---

**Power/Pressure Control**

- 0 Without Power or Pressure Control.
- 1 Power Control.
- 4 Pressure Compensation.
- 7 Power Control and Pressure Compensation

**Power Setting Code**

- 0 No Power Control.
- 1-4} See Power Setting Codes on Pages 7 & 8

**Displacement Control**

- 0 Without Displacement Control.
- P Positive Displacement Control.
- N Negative Displacement Control.
- E Electrical positive displacement control.
- L Load Sense.

**Power Control Mode**

- H High Power Band.
- M Medium Power Band.
- L Low Power Band.
- 0 No Power Control.

## Standard Gear Pump Arrangements

Pump Size and Ordering Code	Gear Pump Displacement
K3VG 63 - 1 1 # # - ####	10 cm <sup>3</sup> /rev
K3VG 112 - 1 1 # # - ####	10 cm <sup>3</sup> /rev
K3VG 180 - 1 1 # # - ####	10 cm <sup>3</sup> /rev
K3VG 280 - 1 2 # # - ####	15 cm <sup>3</sup> /rev
K3VG 180DT - 1 A # # - #### # 1	25.3 cm <sup>3</sup> /rev
K3VG 280DT - 1 A # # - #### # 1	32.5 cm <sup>3</sup> /rev

**Note:** The "#" denotes any available selection for the pump - See the [Ordering Code for the Pump](#).



**Summary of Control Options**

<b>Power/Pressure Control Code</b>	<b>Displacement Control Code</b>	<b>Description</b>
0	P	Infinitely variable positive displacement control by pilot pressure
0	N	Infinitely variable negative displacement control by pilot pressure
0	E	Infinitely variable positive displacement control by Electrical Proportional Valve
1	0	Power control with maximum displacement stop
1	P	Power and positive displacement control by pilot pressure
1	N	Power and negative displacement control by pilot pressure
1	E	Power and positive electrical displacement control
4	0	Pressure compensation
4	L	Load sense control
7	0	Power and pressure compensation
7	P	Power, pressure compensation and positive displacement control
7	N	Power, pressure compensation and negative displacement control
7	E	Power, pressure compensation and electrical positive displacement control
7	L	Power control and Load sensing. (also available with a combined displacement control option)

**Note:**

When using displacement control at pump delivery pressures below 40bar, a pressure assist signal is required to maintain adequate response.


The pressure assist signal can be provided by either an attached gear pump or an external source.

The optional attached gear pump is recommended for use with all displacement control options.

All displacement control hydraulic circuit diagrams illustrate the attached gear pump.

**Power Setting Codes**

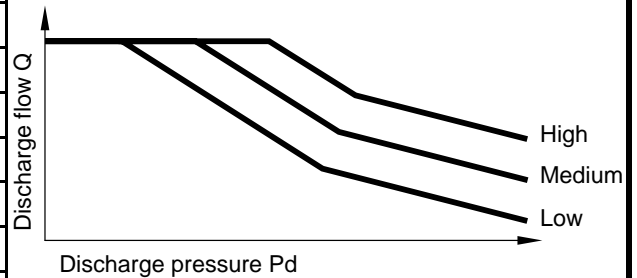Standard Regulator code at 1500 rpm – pumps without auxiliary gear pump						
Motor Power kW	K3VG Pump Frame Size					
	63	112	180	280	180DT	280DT
11	L4					
15	L1					
18.5	M2					
22	M1	L3				
30	H2	M3	L3			
37		M1	L1			
45		H5	M4			
55		H3	M2	L2		
75			H4	M4	L2	
90			H2	M2	M4	
110				H4	M2	L3
132				H2	H4	L1
160					H2	M3
200						M1
250						H4
280						H2




Example 1 Without gear pump:

Pump: K3VG112-10NR-10??  
 Electric Motor: 22 kW at 1500 rpm  
 Power Set Code: L3  
 Final Mode/Code: K3VG112-10NR-10L3

**Power Adjustment Range**

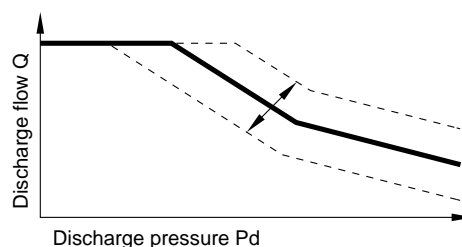The power setting can be adjusted via external adjusting screws. The adjustment range of the power control settings at 1500 rpm is given in the table below.

Power control settings (kW) at 1500 rpm						
Pump model	K3VG63	K3VG112	K3VG180	K3VG280	K3VG180DT	K3VG280DT
H - High Power	22.0~33.8	37.0~62.1	55.0~96.5	90.0~150.1	109.4~192.9	197.3~300.3
M - Medium Power	15.6~22.4	27.1~45.6	43.9~75.0	67.3~113.5	87.9~134.5	137.2~239.2
L - Low Power	10.6~18.9	19.1~30.7	29.9~45.6	46.8~75.0	59.9~91.1	93.5~160.0

**Note:**



For additional speed and power settings contact Kawasaki Precision Machinery (UK) Ltd.



## Functional Description of Regulator



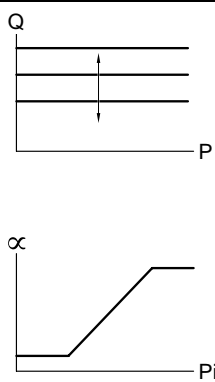
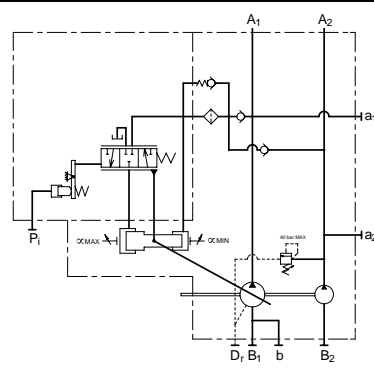
Key to Hydraulic Circuit Annotations	
Annotation	Description
A <sub>1</sub>	Main pump delivery
A <sub>2</sub>	Auxiliary pump delivery
a <sub>1</sub>	Gauge port main pump delivery
a <sub>2</sub>	Gauge port auxiliary pump delivery
B <sub>2</sub>	Gear pump suction
B <sub>1</sub>	Main pump suction
b	Suction gauge port
Dr	Drain
Pi	Pilot pressure
Pc	Remote Pilot Port, Pressure Compensator
Pi	Pilot Port Displacement Control
P <sub>L</sub>	Load sense port
Psv	Pressure Assist Port

**Note:** The optional attached gear pump is recommended for all displacement control options. Hydraulic circuit diagrams illustrate the attached gear pump







Regulator Code	Control Curves	Hydraulic Circuit
<p><b>OP Variable Delivery positive displacement control</b></p> <p>Infinitely variable adjustment of the delivery flow is possible by the pilot hydraulic pressure.</p> <p>An increase in pilot signal will result in an increase in displacement, hence the positive control.</p>	 <p>Range of Displacement Control 2.5 - 100%</p>	









## Functional Description of Regulator (continued)

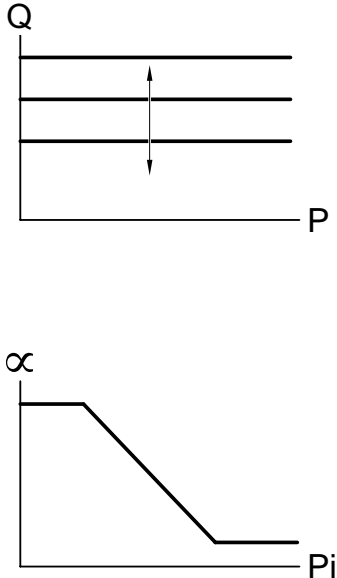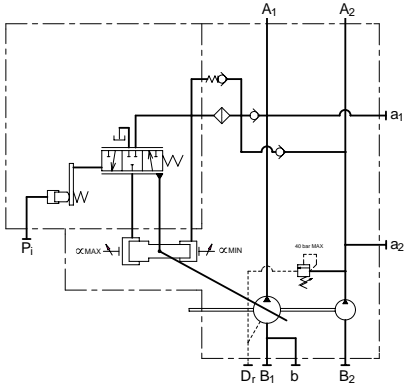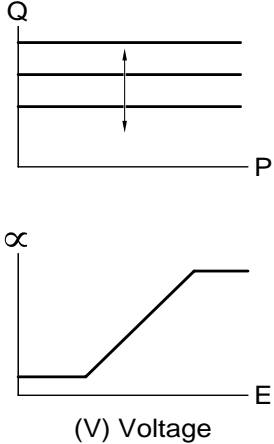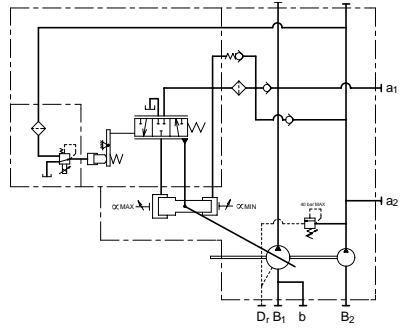Regulator Code	Control Curves	Hydraulic Circuit
<p><b>0N Variable delivery negative displacement control</b></p> <p>Infinitely variable adjustment of the delivery flow is possible by the pilot hydraulic pressure.</p> <p>An increase in pilot signal will result in an decrease in displacement, hence the negative control.</p>	 <p>Range of displacement control 15 – 100%</p>	
<p><b>OE Variable Delivery Electrical Displacement Control</b></p> <p>Infinitely variable adjustment of the delivery flow is possible by using the pilot voltage. (Utilising a solenoid operated proportional pressure reducing valve). The pilot voltage is used as a power source for the solenoid operated proportional pressure reducing valve; a 10cc gear pump is available which eliminates redundant external piping. This regulator requires an amplifier to provide the electrical signal.</p>	 <p>(V) Voltage</p> <p>Range of displacement control 2.5 – 100%</p>	





## Functional Description of Regulator (continued)

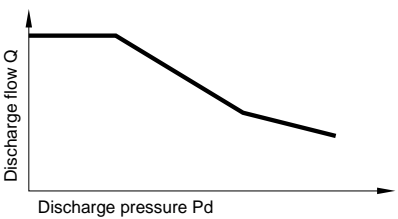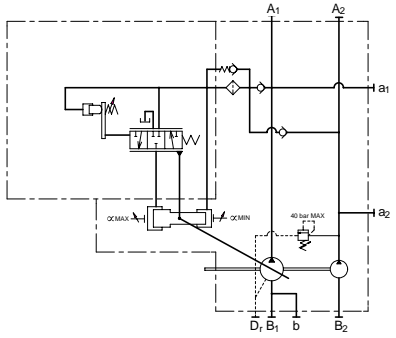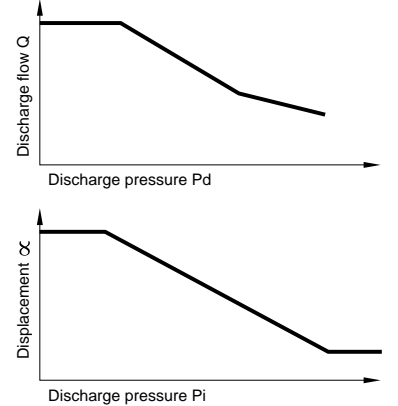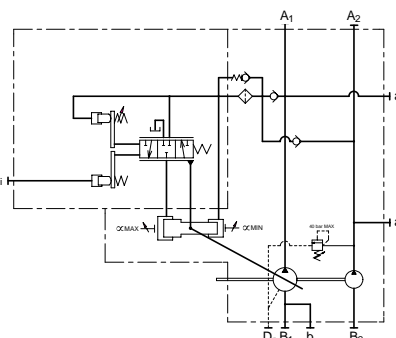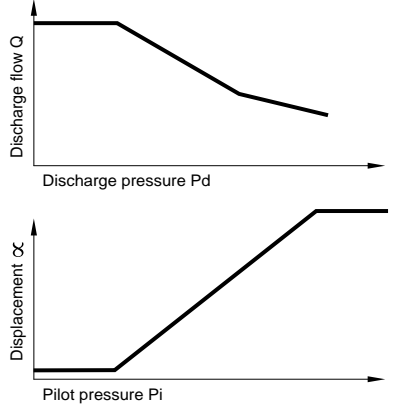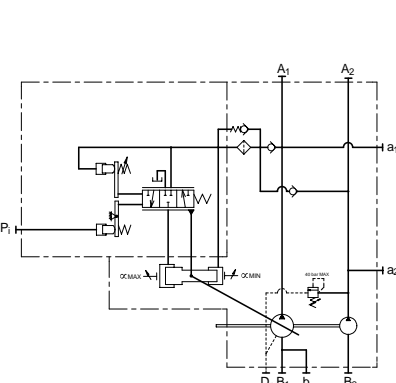Regulator Code	Control Curves	Hydraulic Circuit
<p><b>10## Power Control</b></p> <p>In response to a rise in delivery pressure, the swash-plate tilting angle is decreased, limiting the input torque. This regulator prevents excessive load against the prime mover.</p>		
<p><b>1N Power and Negative Displacement Control</b></p> <p>In response to a rise in delivery pressure, the swash-plate tilting angle is decreased, limiting the input torque. This regulator prevents excessive load against the prime mover. By adding a pilot signal to the Pi port the discharge flow can be infinitely adjusted within the range of the pump. An increase in pilot signal will result in a decrease in flow, hence the Negative control.</p>	 <p><b>Range of Displacement control 15-100%</b></p>	
<p><b>1P Power and Positive Displacement control</b></p> <p>This regulator combines the Power Control with Positive Displacement control. By adding a pilot signal to the Pi port the discharge flow can be infinitely adjusted within the range of the pump. An increase in pilot signal will result in an increase in flow, hence the Positive control.</p>	 <p><b>Range of Displacement control 2.5-100%</b></p>	

## Functional Description of Regulator (continued)

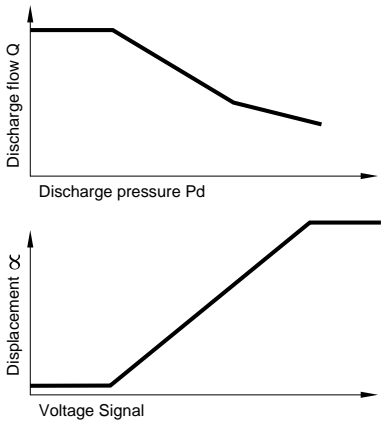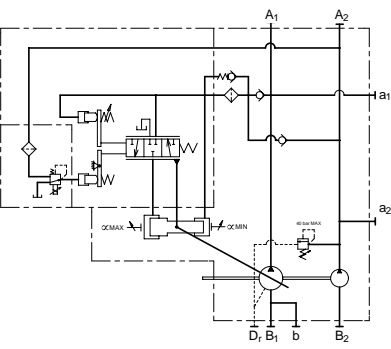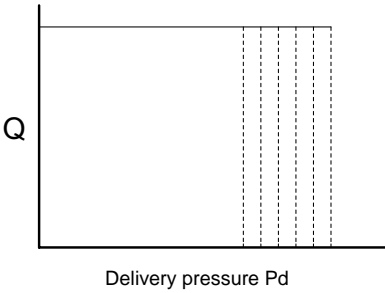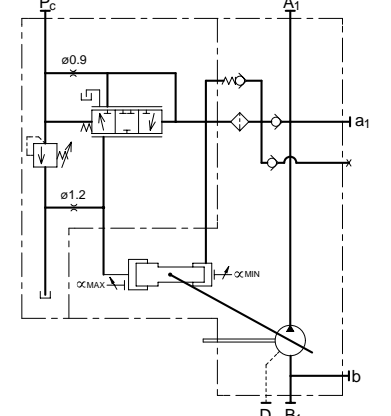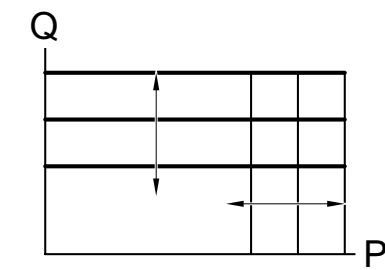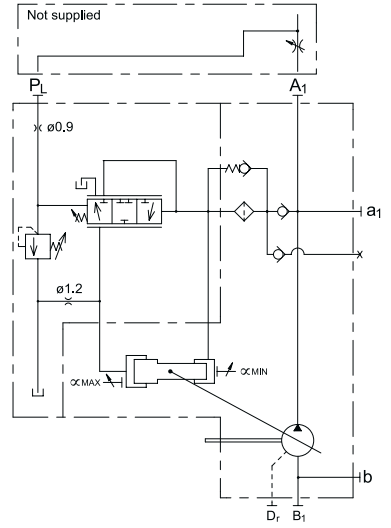Regulator Code	Control Curves	Hydraulic Circuit
<p><b>1E Power and Electrical Displacement control</b></p> <p>This regulator combines the Power Control with Electrical Displacement control. A proportional reducing valve is added to the regulator so the discharge flow can be infinitely adjusted within the range of the pump. An increase in electrical signal to the proportional reducing valve will result in an increase in flow. This regulator requires an amplifier to provide the electrical signal.</p>	 <p><b>Range of Displacement control</b> 2.5-100%</p>	
<p><b>4000 Pressure Compensated Control</b></p> <p>This regulator maintains a constant pressure regardless of the discharge flow. It is imperative that a safety relief valve is installed in the circuit.</p> <p><b>Note:</b> Standard factory pressure setting is 200 bar with an adjustable range of 80 bar to 315 bar. For pressure settings above 315 bar please state clearly on the order.</p>	 <p><b>Range of Displacement control</b> 0-100%</p>	
<p><b>4L00 Pressure Compensation and Load Sense Control</b></p> <p>This regulator controls the pump displacement to match the flow requirement as a function of the load sensing differential pressure with a factory setting of 25 bar <math>\Delta p</math>. Also provides the facility for pressure limiting.</p> <p><b>Note:</b> Standard factory pressure setting is 200 bar with an adjustable range of 80 bar to 315 bar. For pressure settings above 315 bar please state clearly on the order.</p>	 <p><b>Range of Displacement control</b> 0-100%</p>	
<p>Model K3VG</p>	<p>Page 11.34</p>	<p>Data Sheet P-1001/03.04</p>





## Functional Description of Regulator (continued)

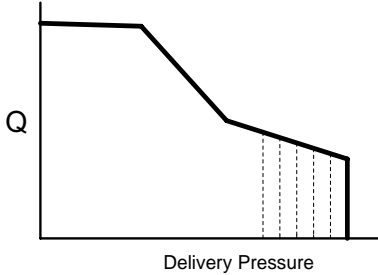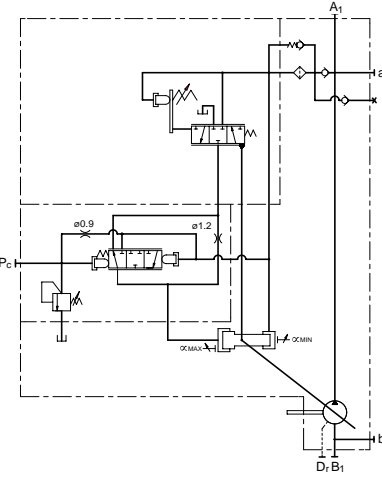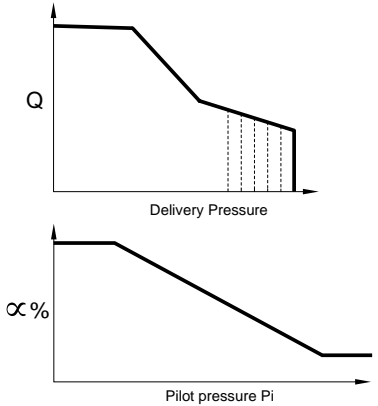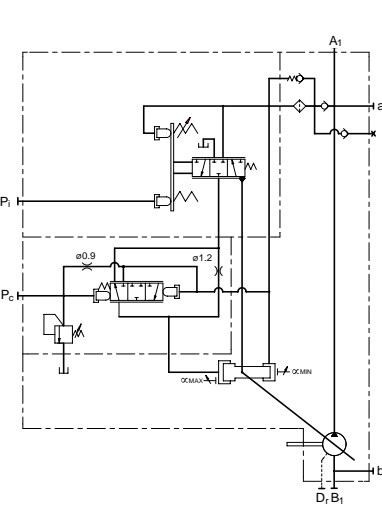Regulator Code	Control Curves	Hydraulic Circuit
<p><b>70 Power and Pressure Compensation</b></p> <p>This regulator combines the Power with Pressure Compensated Control.</p> <p><b>Note:</b> Standard factory pressure setting is 320 bar with an adjustable range of 80 bar to 350 bar.</p>		
<p><b>7N Power, Pressure Compensation and Negative Displacement control</b></p> <p>This regulator combines the Power Control with Pressure Compensated Control. By adding a pilot signal to the Pi port the discharge flow can be infinitely adjusted within the pump range. An increase in pilot signal will result in a decrease in flow, hence the Negative control.</p> <p><b>Note:</b> Standard factory pressure setting is 320 bar with an adjustable range of 80 bar to 350 bar.</p>	 <p><b>Range of Displacement control 100-15%</b></p>	


Functional Description of Regulator (continued)

Regulator Code	Control Curves	Hydraulic Circuit
<p><b>7P Power, Pressure Compensation and Positive Displacement control</b></p> <p>This regulator combines the Power Control with Pressure Compensation Control. By adding a pilot signal to the Pi port the discharge flow can be infinitely controlled within the range of the pump displacement. An increase in pilot signal will result in an increase in flow, hence the Positive control.</p> <p><b>Note:</b></p> <p>Standard factory pressure setting is 315 bar with an adjustable range of 80 bar to 350 bar.</p>	<p><b>Range of Displacement control</b> 2.5-100%</p>	


## Functional Description of Regulator (continued)

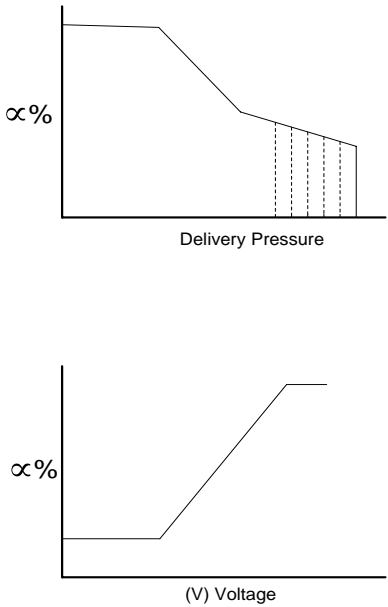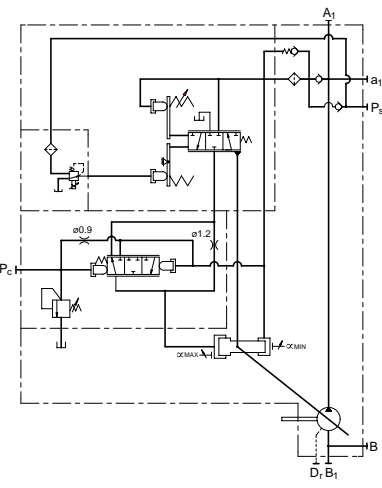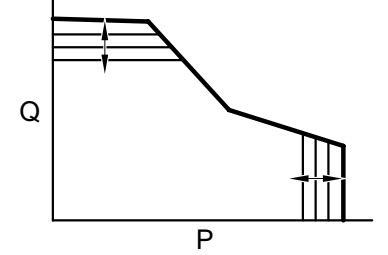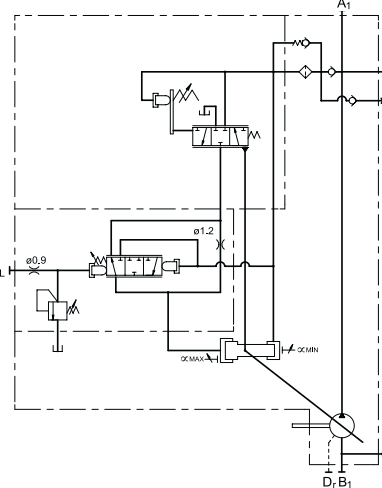Regulator Code	Control Curves	Hydraulic Circuit
<p><b>7E Power, Pressure Compensation and Electrical Displacement control</b></p> <p>This regulator combines the Power Control with Pressure Compensation and Electrical Displacement control. A proportional reducing valve is added to the regulator so the discharge flow can be infinitely adjusted within the pump range. An increase in electrical signal to the proportional reducing valve results in an increase in flow. This regulator requires an amplifier to provide the signal.</p> <p><b>Note:</b> Standard factory pressure setting is 200 bar with an adjustable range of 80 bar to 315 bar. For pressure settings above 315 bar please state clearly on the order.</p>	 <p><b>Range of Displacement control</b> <b>2.5-100%</b></p>	
<p><b>7L Power, Pressure Compensation and Load Sense Control</b></p> <p>This regulator combines Power Control and Load Sense Control. Load sense factory setting 25 bar <math>\Delta p</math>. Adjustment range 10 to 30 bar.</p> <p><b>Note:</b> Standard factory pressure setting is 200 bar with an adjustable range of 80 bar to 315 bar. For pressure settings above 315 bar please state clearly on the order.</p>	 <p><b>Range of Displacement control</b> <b>0-100%</b></p>	

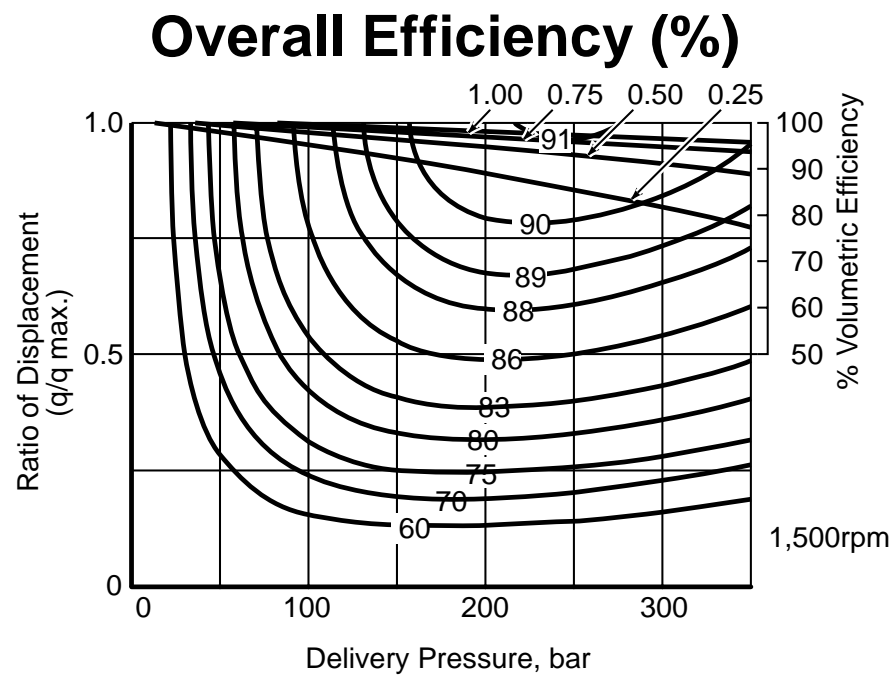
Performance Curves - K3VG63




Performance Curves - K3VG112

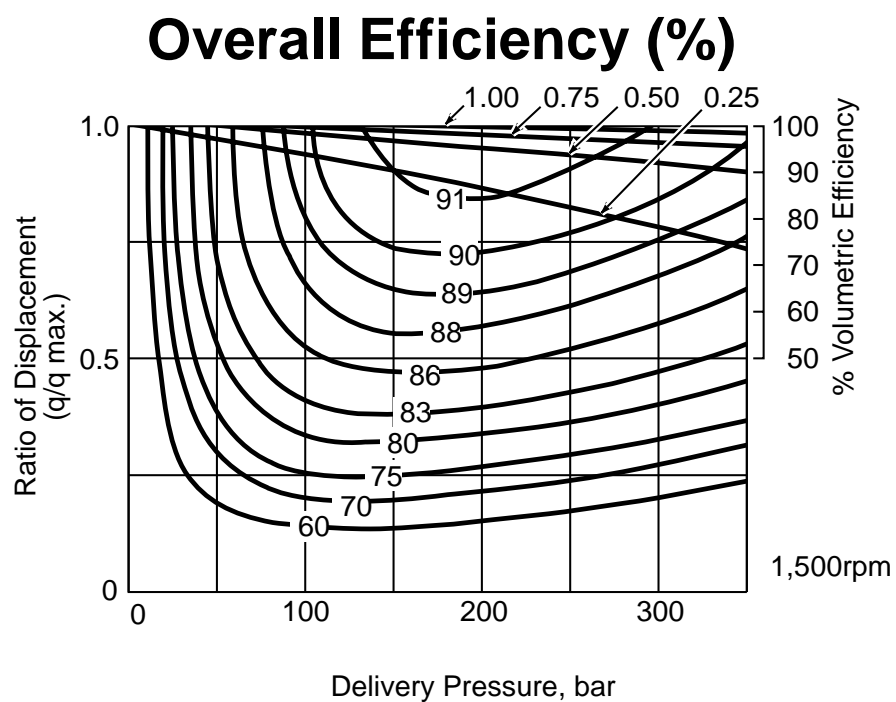

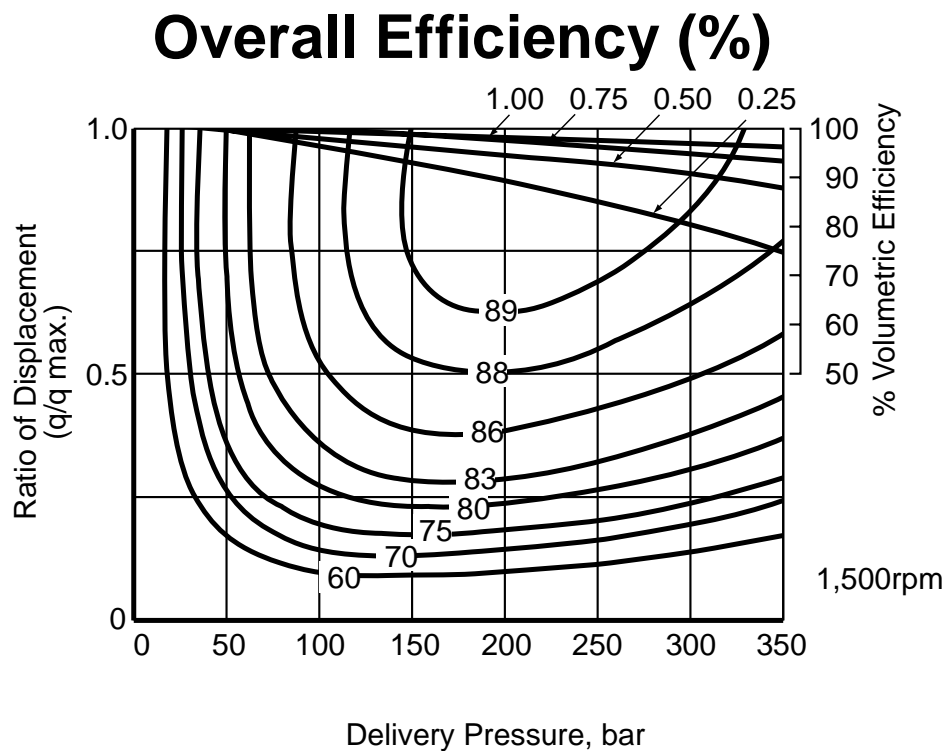Performance Curves - K3VG180 and K3VG180DT






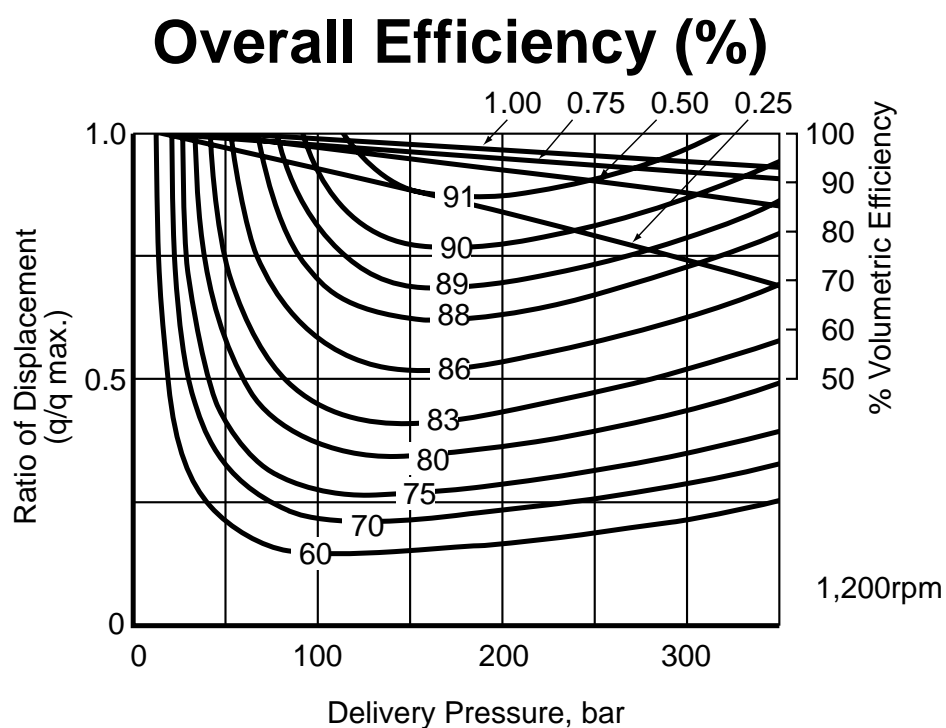Performance Curves - K3VG280 and K3VG280 DT











Displacement control Curves - K3VG63

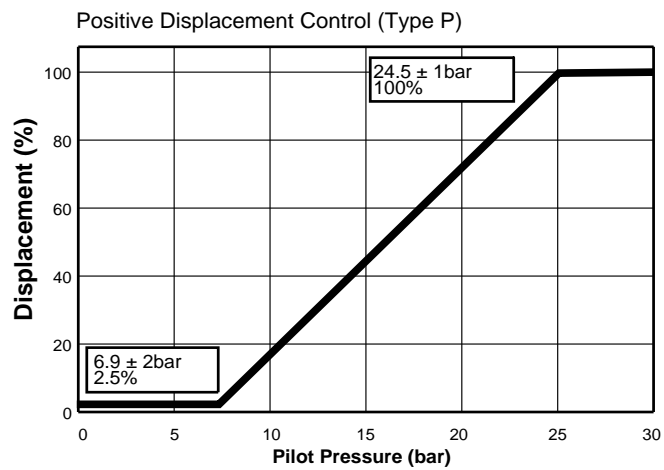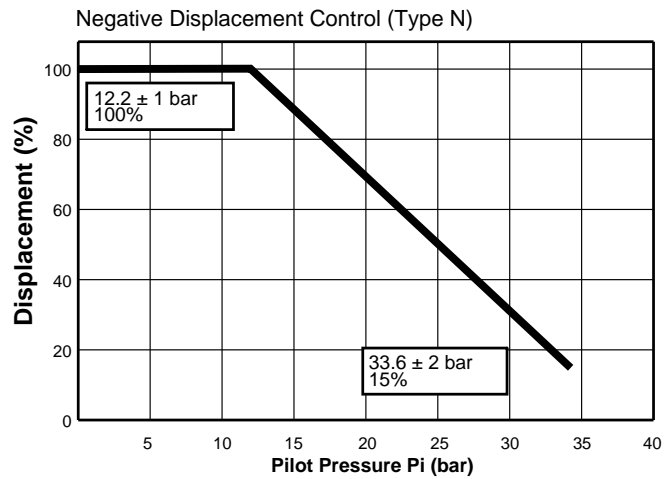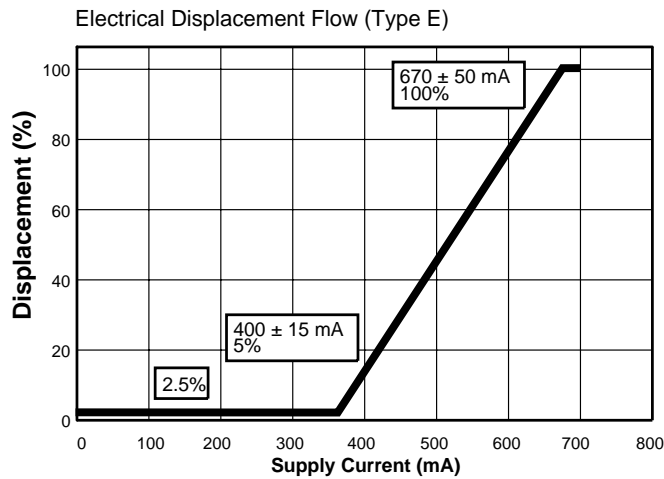




Displacement control Curves - K3VG112

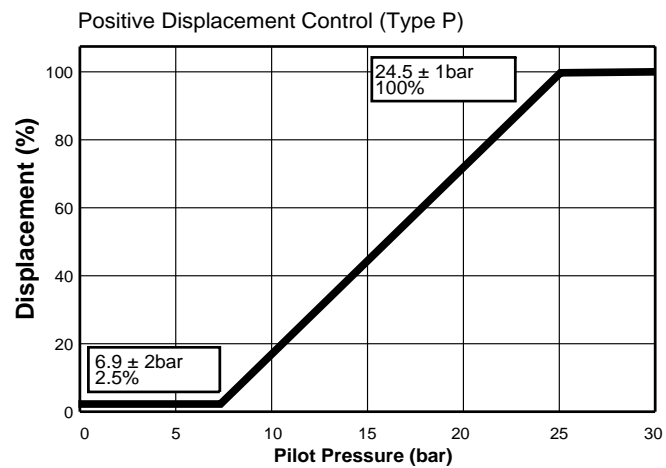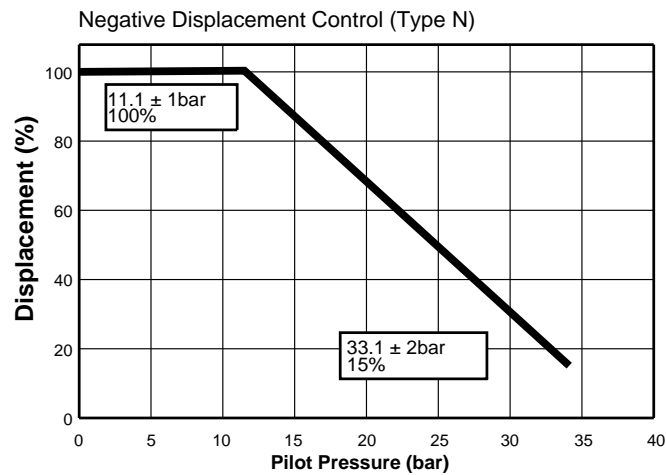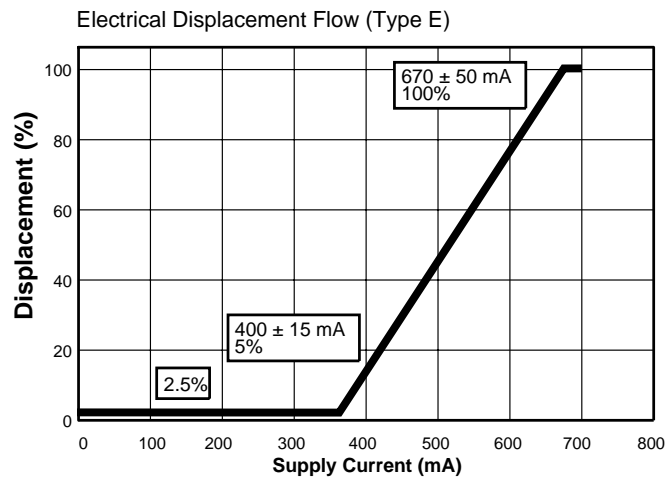

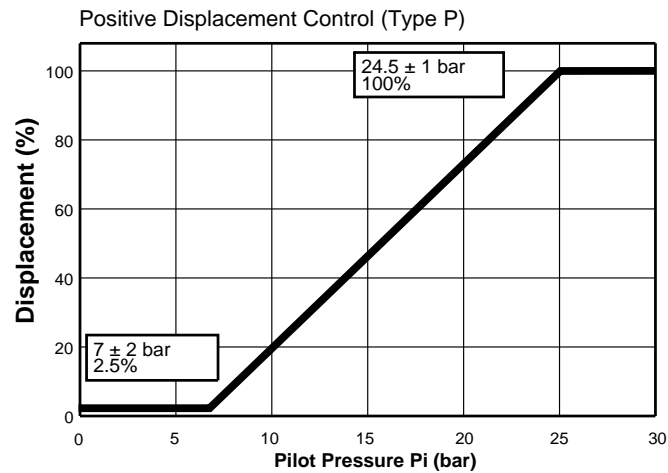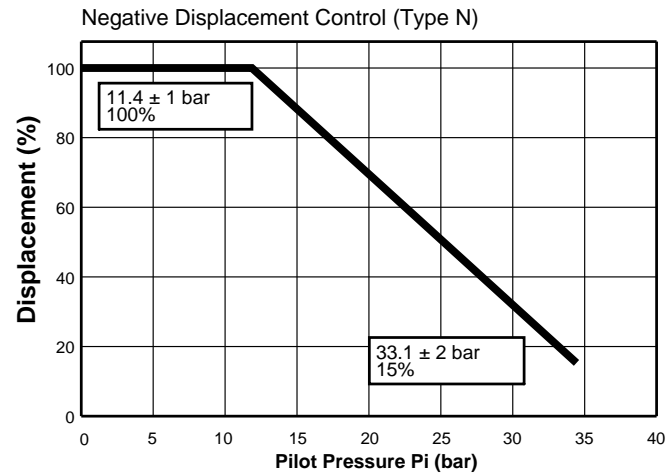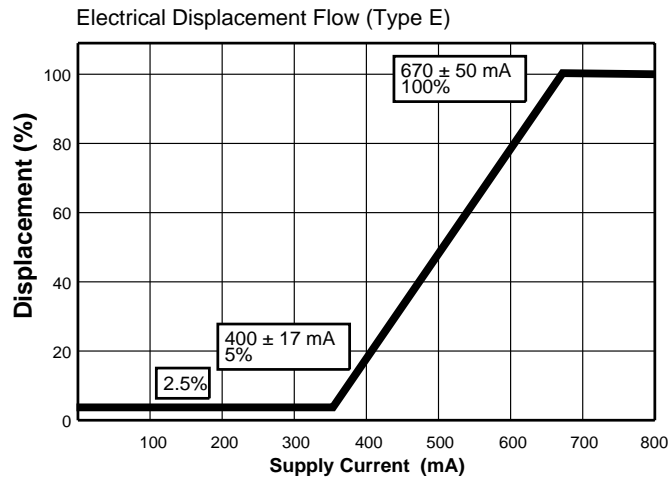Displacement control Curves - K3VG180/180DT



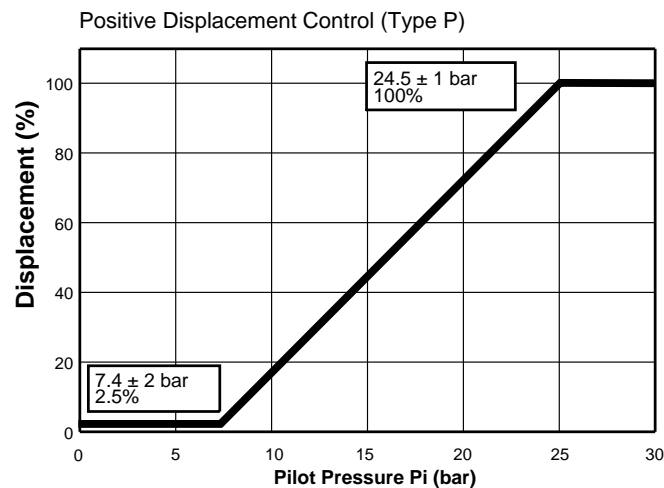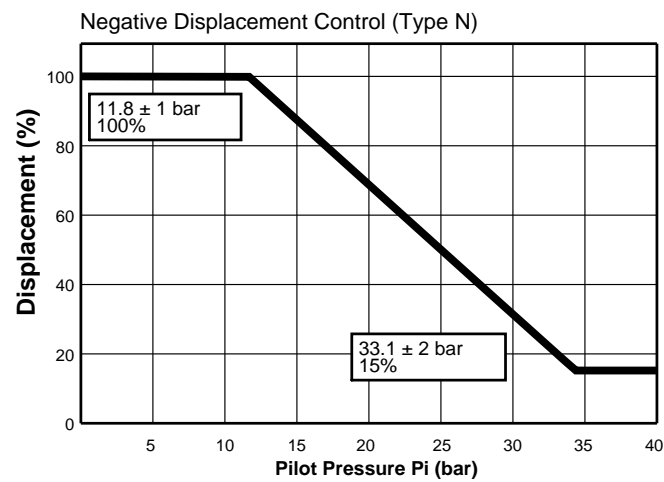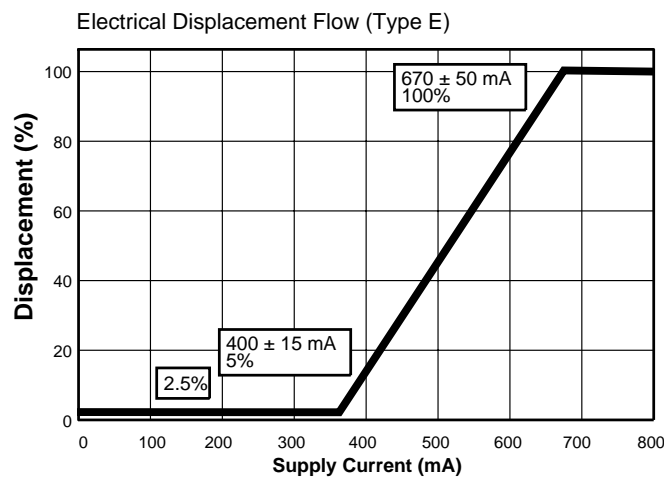Displacement control Curves - K3VG280/280DT




## Installation

### Recommended Pump Mounting


The pump should be mounted horizontally with the case drain piping initially rising above the level of the pump before continuing to the tank as shown in the illustration below. Do not connect the drain line to the suction line.

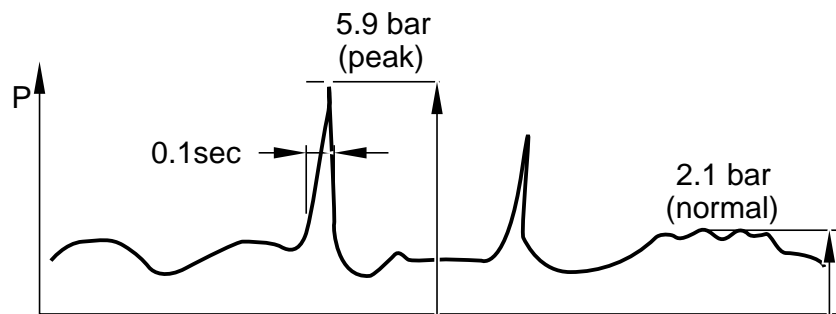The uppermost drain port should be used and the drain piping should be equal or larger in size than the drain port to minimise pressure in the pump case. The pump case pressure should not exceed 2.1 bar as shown in the illustration below. (Peak pressure should never exceed 5.9 bar.)




### Mounting the Pump Above the Tank

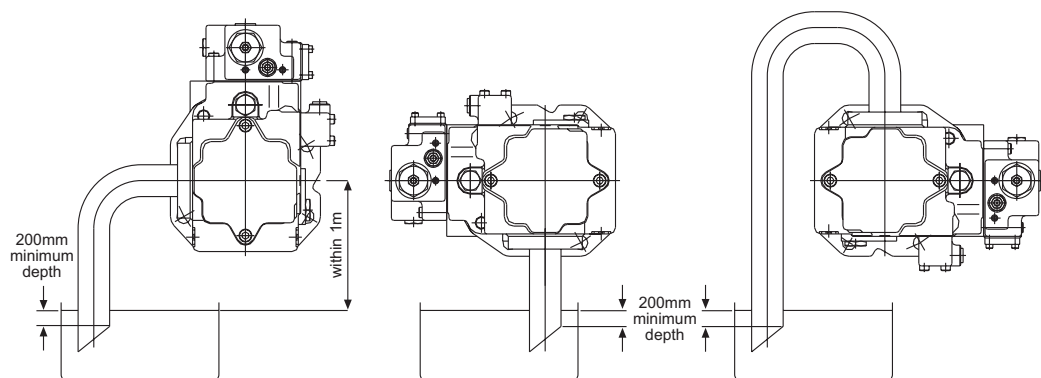Suction line



Drain line

“Goose neck” configuration is required, this prevents direct drop of oil level in the pump case



### Cautions

- A) Suction and drain pipes must be immersed by 200mm minimum from the lowest oil level under operating conditions.
- B) Height from the oil level to the centre of the shaft must be within 1m.
- C) The oil in the pump case must be refilled when the pump has not been operated for one month or longer.

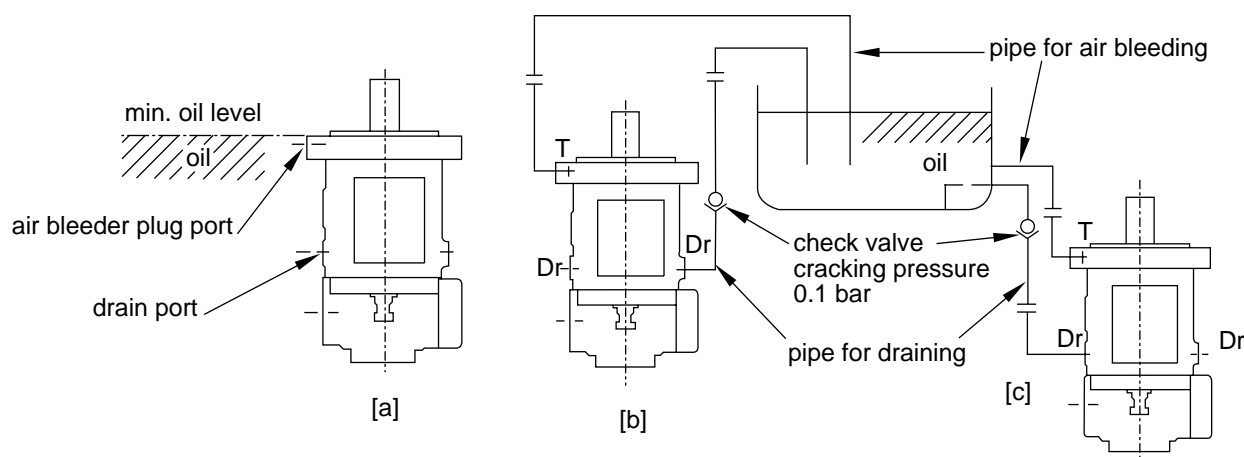
**Installation (continued)****Mounting the Pump Vertically (shaft up)**

For applications requiring vertical installation (shaft up) the pump must be provided with additional means to lubricate the front bearing. Do not use a standard pump for this type of application. (Mounting orientation "V" type should be used.)

The oil level in the tank should be higher than the pump-mounting flange as shown in illustration [a] below. If the oil level in the tank is lower than the pump mounting flange then forced lubrication is required through the air bleed port 1 ~ 2 l/min.

When installing the pump in the tank and submerged in the oil, open the drain port and air bleed port to provide adequate lubrication to the internal components.

When installing the pump outside the tank run piping for the drain and air bleed ports to tank (see illustration [c]). If the drain or air bleed piping rise above the level of oil (see illustration [b]) fill the lines with oil before operation.



A check valve with cracking pressure of 0.1 bar should be fitted to the case drain line as shown. Recommended Kawasaki check valves are as follows: (refer to Kawasaki industrial valve information - data sheet C1001)

Model	Recommended Kawasaki check valve
K3VG 63	C10G - 10/01-*
K3VG 112	C15G - 10/01-*
K3VG 180	C15G - 10/01-*
K3VG 280	C15G - 10/01-*
K3VG 180 DT	C20G - 10/01*
K3VG 280 DT	C20G - 10/01*



### Drive Shaft Coupling

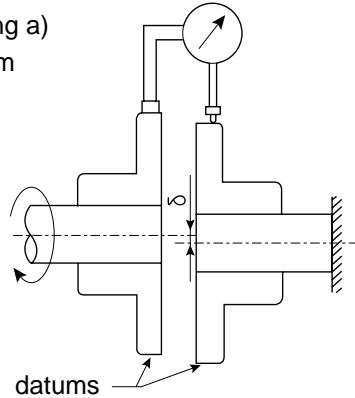
Use a flexible coupling to connect the pump shaft to an engine flywheel or electric motor shaft. Alignment should be within 0.05mm TIR as shown in the illustration below.

Do not apply any radial or axial loading to the pump shaft. For applications where radial or side loads exist please contact Kawasaki Precision Machinery (UK) Ltd. for recommendations.

Do not force the coupling on or off the pump shaft. Use the threaded hole in the end of the pump shaft to fix or remove the coupling.


dial gauge (reading a)

$$\delta = a/2 \quad 0.025\text{mm}$$




dial gauge (reading b)
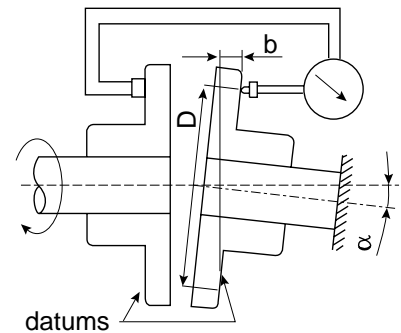
$$\alpha = \sin^{-1}(b/D) \\ 0.2^\circ$$



For engine drives a split type pinch bolt drive flange and flexible coupling is recommended.

## Unit Dimensions – K3VG63/112/180/280

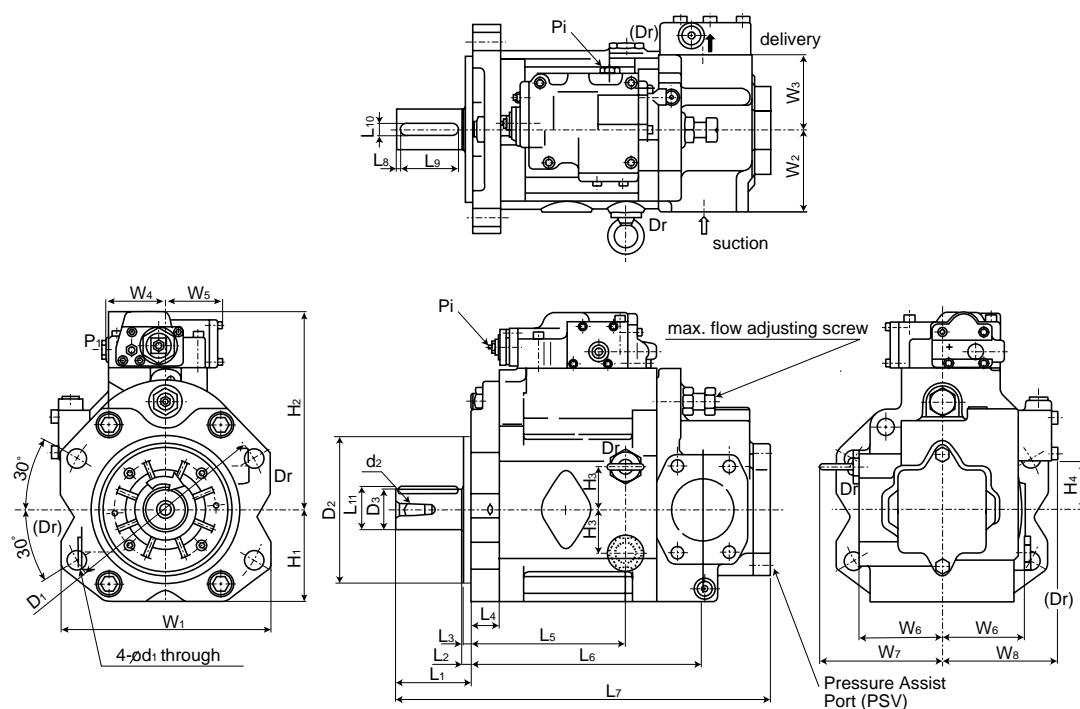

## Dimensions of single pumps without gear pump (dimensions in mm)

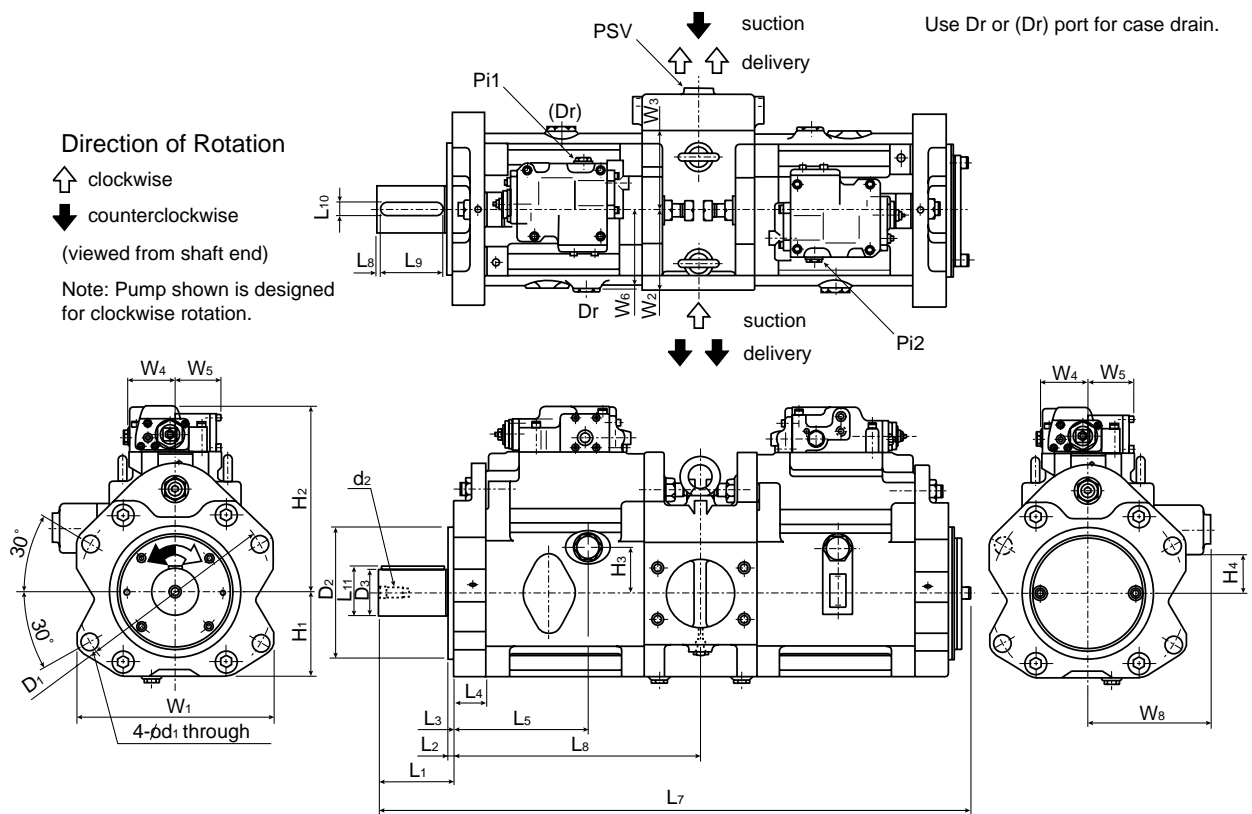
Pump size	$D_1$	$D_2$	$D_3$	$L_1$	$L_2$	$L_3$	$L_4$	$L_5$	$L_6$
63	180	125 <sup>-0.050 -0.090</sup>	32 <sup>k6</sup>	68	10	8	27	138	210
112	224	160 <sup>-0.050 -0.090</sup>	40 <sup>k6</sup>	92	10	8	33	167	249
180	250	180 <sup>-0.050 -0.090</sup>	50 <sup>k6</sup>	92	10	8	36	190	285
280	300	200 <sup>-0.050 -0.090</sup>	55 <sup>k6</sup>	92	10	8	50	203	351

Pump size	$L_7$	$L_8$	$L_9$	$L_{10}$	$L_{11}$	$H_1$	$H_2$	$H_3$	$H_4$
63	349	4	50	10	35	89	195	37	41
112	419	5	70	12	43	100	220	41	49
180	466	5	70	14	53.5	112	245	53	58
280	539	5	70	16	59	127	286	70	68

Pump size	$W_1$	$W_2$	$W_3$	$W_4$	$W_5$	$W_6$	$W_7$	$W_8$	$d_1$	$d_2$
63	190	70	70	72	69	76	115	113	18	M12
112	234	90	80	72	69	90	138	125	22	M12
180	256	100	92	72	69	101	149	139	22	M16
280	300	120	120	72	69	118	-	167	26	M16



## Unit Dimensions – K3VG180DT/280DT



Dimensions of double pumps without gear pump (dimensions in mm)


Pump size	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	L <sub>4</sub>	L <sub>5</sub>	L <sub>6</sub>
180DT	250	180 <sup>-0.050 -0.090</sup>	60 <sup>k6</sup>	115	10	8	36	190	311
280DT	300	200 <sup>-0.050 -0.090</sup>	70 <sup>k6</sup>	115	10	9	50	203	374

Pump size	L <sub>7</sub>	L <sub>8</sub>	L <sub>9</sub>	L <sub>10</sub>	L <sub>11</sub>	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	H <sub>4</sub>
180DT	786	5	95	18	64	112	245	53	51
280DT	896	5	95	20	74.5	127	286	70	59

Pump size	W <sub>1</sub>	W <sub>2</sub>	W <sub>3</sub>	W <sub>4</sub>	W <sub>5</sub>	W <sub>6</sub>	W <sub>8</sub>	d <sub>1</sub>	d <sub>2</sub>
180DT	256	100	100	72	69	101	165	22	M16
280DT	300	120	120	72	69	118	185	26	M16

**Unit Dimensions – Drain Port (dimensions in mm)****Dimensions of drain ports in mm**

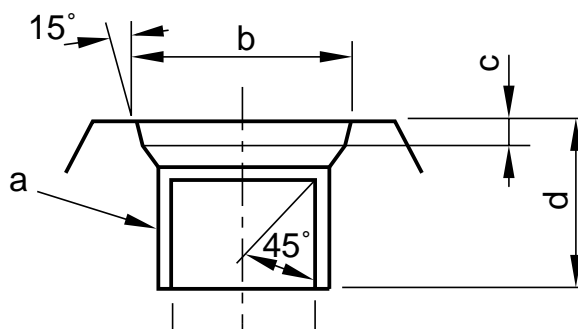Pump size	a	b	c	d
63	PF $\frac{1}{2}$	22.6	2.5	19
112	PF $\frac{3}{4}$	30.8	3.5	20
180, 180DT	PF $\frac{3}{4}$	30.8	3.5	20
280, 280DT	PF $\frac{3}{4}$	30.8	3.5	20


**Additional Porting Information**

Port	Size
Pc and P <sub>L</sub> for 4000 regulators	$\frac{1}{4}$ BSPT
Pc and P <sub>L</sub> for type 7 regulators	$\frac{1}{4}$ PF
Pi type P displacement control	$\frac{1}{4}$ PF
All gauge ports	$\frac{1}{4}$ PF
Vertical mount air bleed 63, 112, 180 cc displacements	$\frac{1}{8}$ PF
Vertical mount air bleed 280 cc displacements	$\frac{1}{4}$ PF




**Additional 'O' Ring Information**


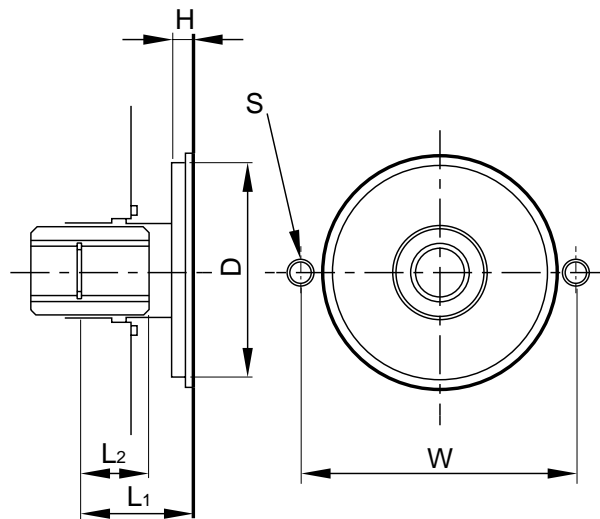
Port Size	'O' Ring Size	Hardness	KPM Part Number
PF $\frac{1}{8}$ "	7.8 ID x 1.90 sec	90 shore	00RBP8
PF $\frac{1}{4}$ "	10.8 ID x 2.4 sec	90 shore	00RBP11
PF $\frac{1}{2}$ "	17.8 ID x 2.4 sec	90 shore	00RBP18
PF $\frac{3}{4}$ "	23.7 ID x 3.5 sec	90 shore	00RBP24




**Unit Dimensions – Mounting Provisions for Attaching Gear Pumps (dimensions in mm)**

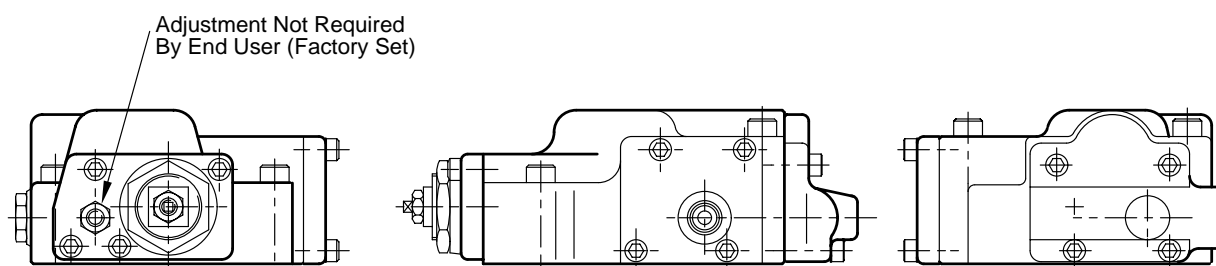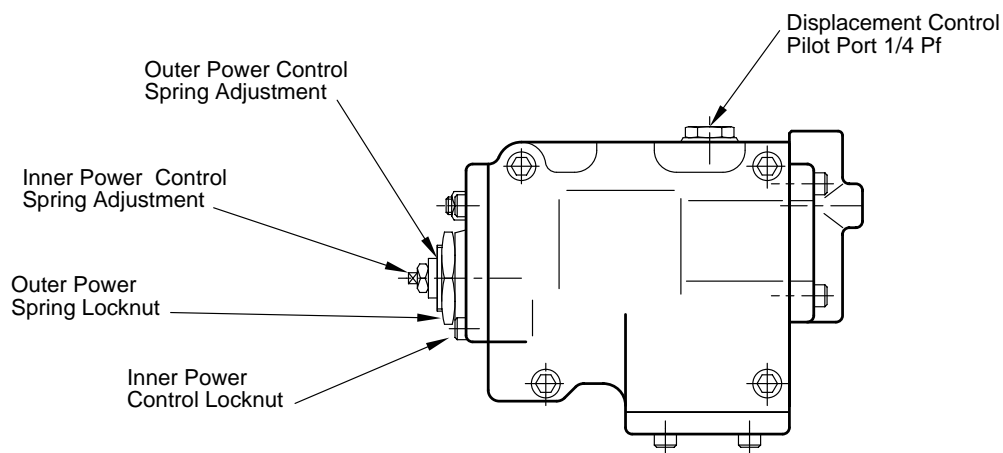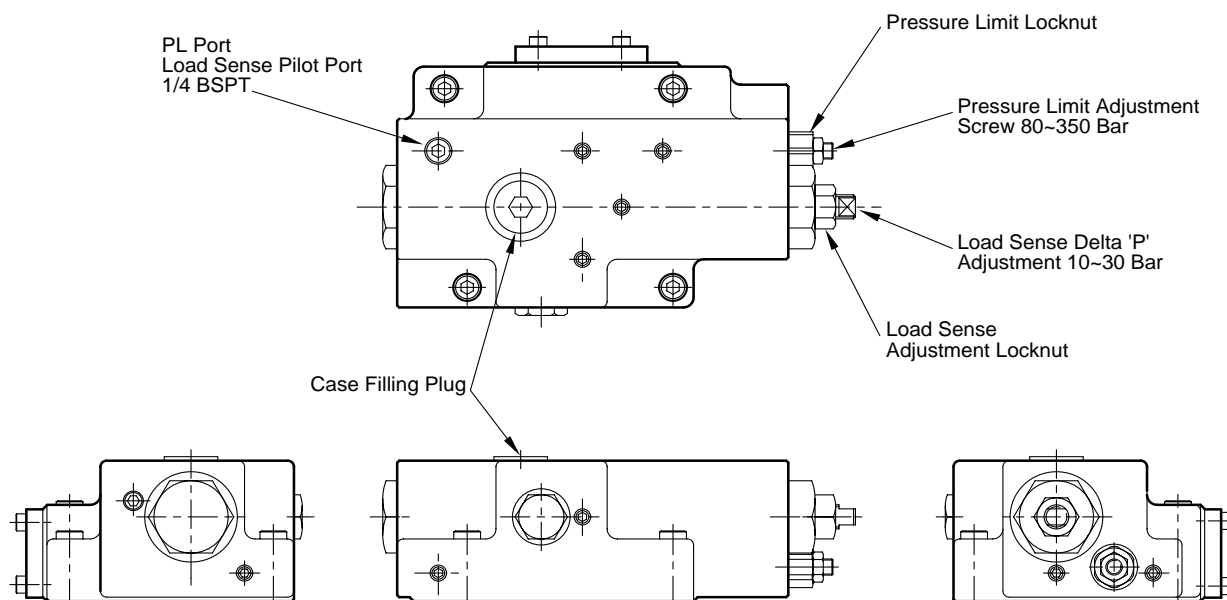Size		63, 112, 180, 280		280, 180DT, 280DT
Install form code	Without assist pressure port	7	G	A
	With assist pressure port	6	H	
Dimensions (Rule SAE"A" for 63, 112, 180 and 280) (Rule SAE"B" for 280, 180DT and 280DT)	D	82.5		101.6
	H	8		11
	W	106		146
	S	2-M10 depth 16		2-M12 depth 20
	L <sup>1</sup>	43	34	43
	L <sup>2</sup>	26	18	26
Dimensions of Spline	Rule	SAE flat root, side fit		
	Number of teeth	13	9	13
	Diametral pitch	16/32		
	Pressure angle	30 <sup>0</sup>		
	Root diameter	22.225 <sup>+0.279</sup> <sub>-0</sub>	16.535 <sup>+0.279</sup> <sub>-0</sub>	22.225 <sup>+0.279</sup> <sub>-0</sub>
	Measurement between pins	16.589 <sup>+0</sup> <sub>-0.067</sub>	10.089 <sup>+0</sup> <sub>-0.095</sub>	16.589 <sup>+0</sup> <sub>-0.067</sub>
	Pin diameter	2.743		
Allowable max.torque (Nm)		214	60	214

**K3VG Regulators****Type 1 Power control, Positive & negative displacement control****Type 4L Load sense & pressure limiting control**

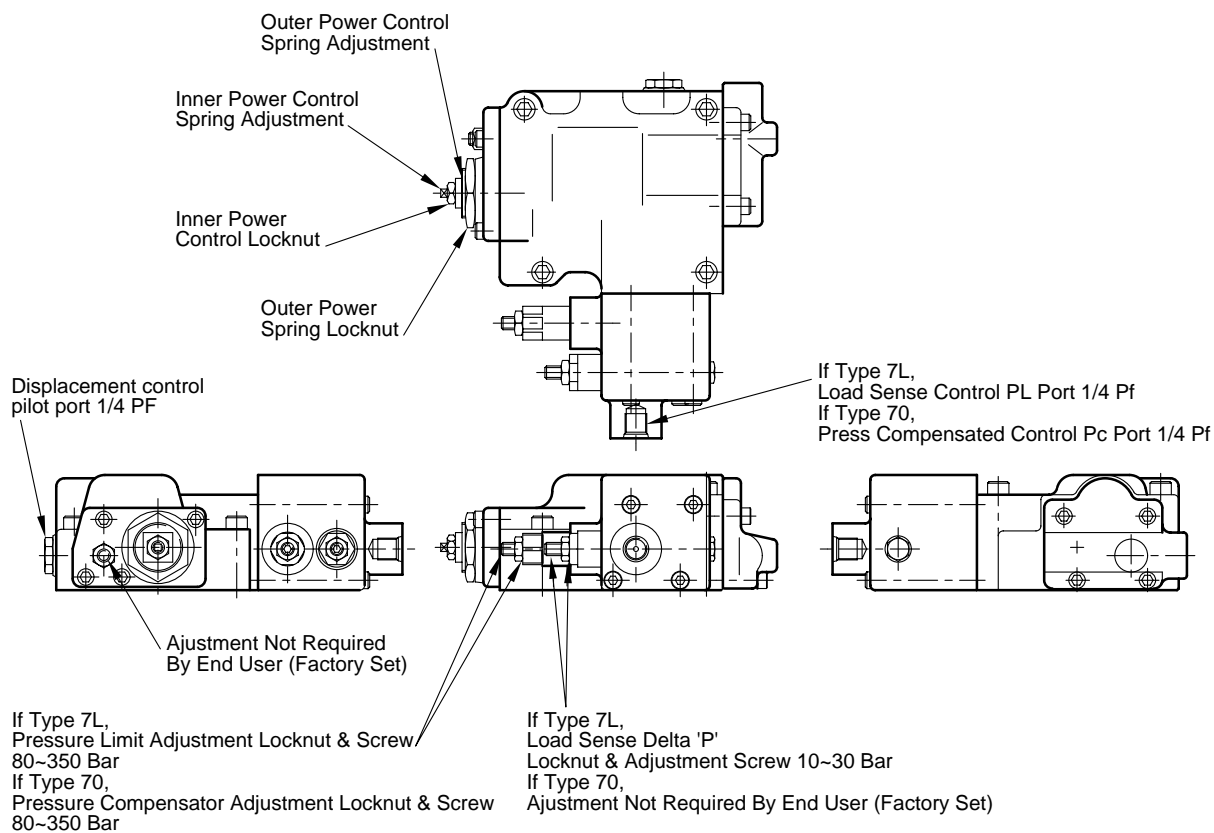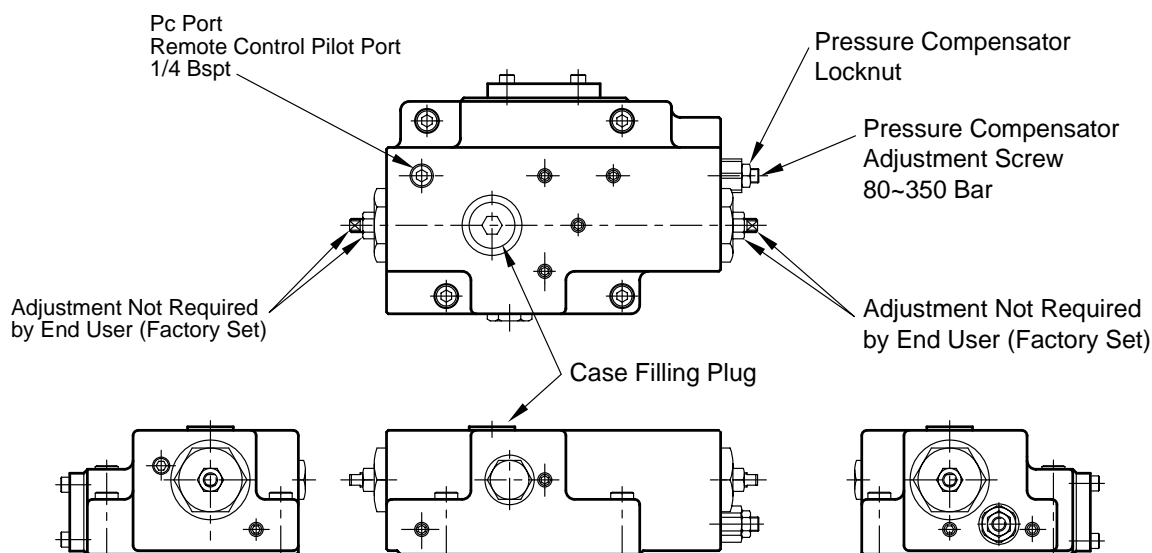**K3VG Regulators (continued)****Type 7 Power control, Negative or positive displacement control, Pressure compensating or load sense control****Type 4 Pressure compensator control**

## Unit Dimensions – Foot Bracket (Accessory) (dimensions in mm)

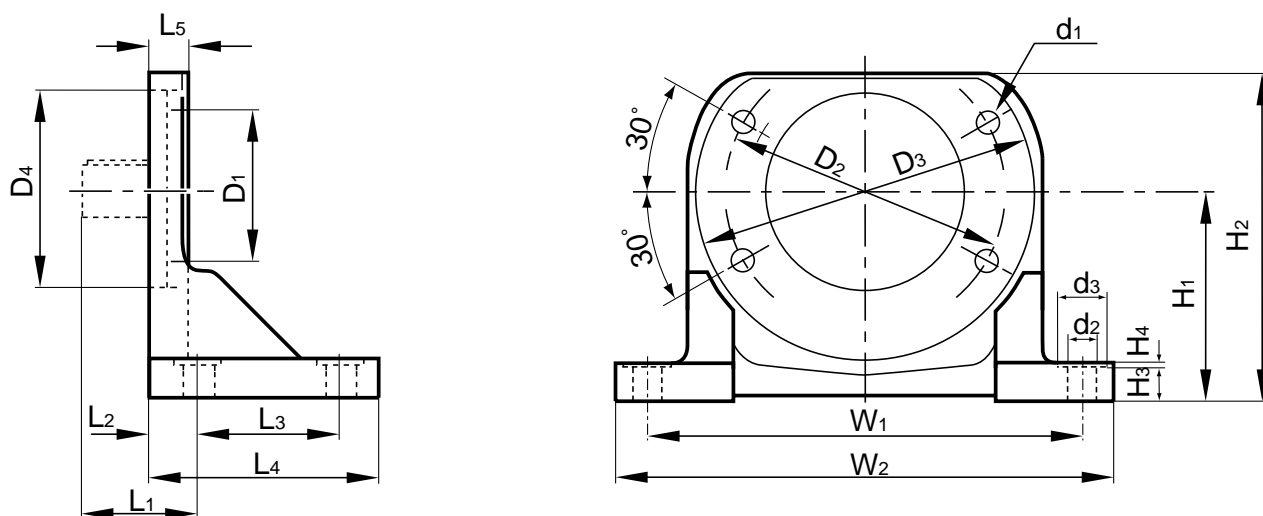


## Dimensions in mm

Pump size	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	D <sub>4</sub>	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	L <sub>4</sub>	L <sub>5</sub>
63	125	180	214	-	75	32	93	150	25
112	160	224	264	-	100	38	112	180	30
180	180	250	290	-	100	44	132	212	36
280	200	300	340	250	100	50	400	500	42
180DT	180	250	290	204	123	44	320	400	36
280DT	200	300	340	250	123	50	400	500	42

Pump size	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	H <sub>4</sub>	W <sub>1</sub>	W <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>
63	132	207	22	3	280	320	M16	18	32
112	160	252	27	3	335	384	M20	22	40
180	180	284	33	3	375	428	M20	22	40
280	225	358	39	3	450	520	M24	34	60
180DT	200	304	33	3	375	428	M20	22	40
280DT	225	358	39	3	450	520	M24	34	60
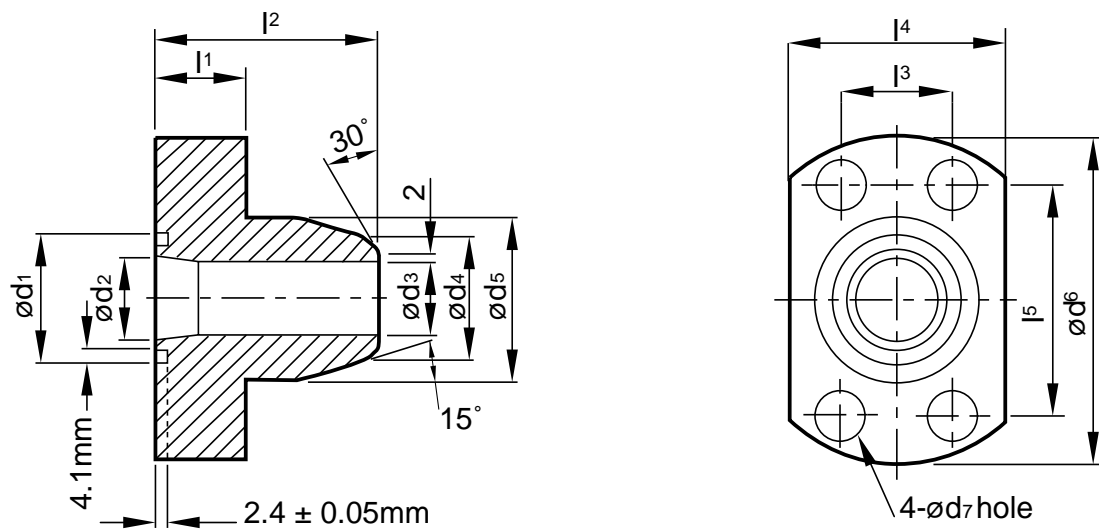
## Unit Dimensions – Flange Accessory for Delivery Port (SAE code 62) (dimensions in mm)



## Delivery Port Flange

Pump size	$l_1$	$l_2$	$l_3$	$l_4$	$l_5$	$d_1$	$d_2$	$d_3$	$d_4$
63	25	55	27.8	54	57.2	40	26	21.2	34
112	30	65	31.8	61	66.7	45	32	29.9	42.7
180	35	75	36.5	70	79.4	50	38	34.4	48.6
280	35	75	36.5	70	79.4	50	38	34.4	48.6
180DT	30	65	31.8	61	66.7	45	32	29.9	42.7
280DT	35	75	36.5	70	79.4	50	38	34.4	48.6

Pump size	$d_5$	$d_6$	$d_7$	SAE Pipe Size	Screw Size
63	43	82	11	1	M10-40
112	50	96	14	$1 \frac{1}{4}$	M12-45
180	58	115	18	$1 \frac{1}{2}$	M16-55
280	58	115	18	$1 \frac{1}{2}$	M16-55
180DT	50	96	14	$1 \frac{1}{4}$	M12-45
280DT	58	115	18	$1 \frac{1}{2}$	M16-55

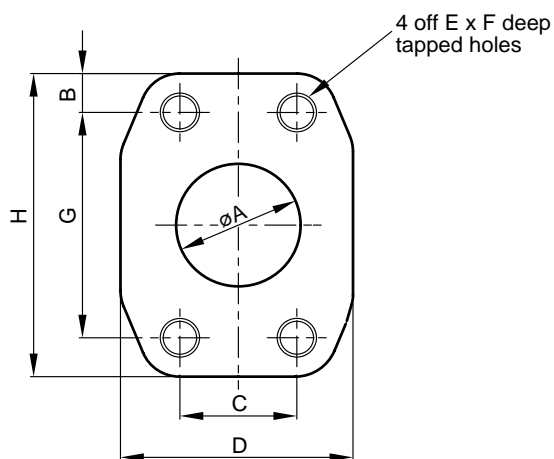
**Unit Dimensions – Flange Accessory for Delivery Port (SAE code 62) (dimensions in mm) (continued)****Delivery Port Flange When Using Confluent Block**

Pump size	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
180DT	40	90	44.5	86	96.8	65	51	43.1	60.5
280DT	40	90	44.5	86	96.8	65	51	43.1	60.5


Pump size	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	SAE Pipe Size	Screw Size
180DT	71	140	22	2	M20-65
280DT	71	140	22	2	M20-65





**Unit Dimensions – Suction and delivery port (dimensions in mm)**

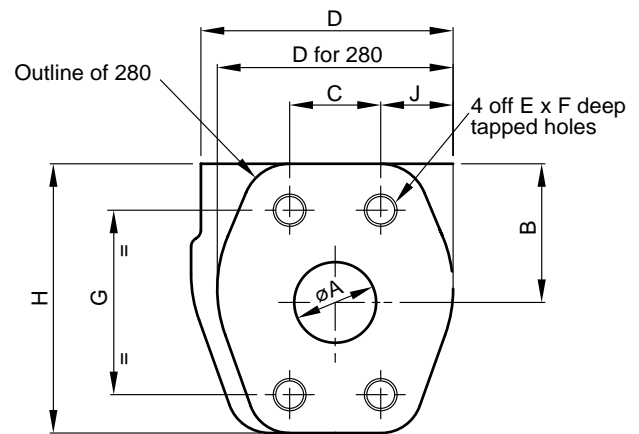SUCTION PORT



DELIVERY PORT

**Delivery Port**

Size	A	B	C	D	E	F	G	H	J
63	25	41	27.8	77	M10 x 1.5	18	57.2	83.5	22
112	32	49	31.8	91	M12 x 1.75	18	66.7	98	30
180	38	58	36.5	111.5	M16 x 2.0	24	79.4	112	36
280	38	70	36.5	96	M16 x 2.0	24	79.4	112	30
180DT	32	51	31.8	80	M12 x 1.75	22	66.7	102	23
280DT	38	59	36.5	83	M16 x 2.0	24	79.4	117	16
WHEN USING CONFLUENT BLOCK									
180DT	51	62	44.5	148	M20 x 2.5	30	96.8	124	26
280DT	51	72	44.5	180	M20 x 2.5	30	96.8	140	23

**Suction Port**

Size	A	B	C	D	E	F	G	H
63	38	12	35.7	71	M12 x 1.75	18	69.9	94
112	64	12	50.8	91	M12 x 1.75	18	88.9	113
180	76	15	61.9	108	M16 x 2.0	24	106.4	136
280	89	15.5	61.9	123	M16 x 2.0	24	120.7	152
180DT	102	15	77.8	152	M16 x 2.0	24	130.2	162
280DT	102	18	77.8	152	M16 x 2.0	24	130.2	170

Technical drawing of a mechanical part, showing front and side views with dimensions.

**Front View (Left):**

- Overall width:  $l_3$
- Overall height:  $l_2$
- Inner circular feature diameter:  $\phi d_1$
- Four small holes (4- $\phi d_5$  hole) arranged in a square pattern.
- Distance from top edge to center of holes:  $l_1$

**Side View (Right):**

- Overall width:  $\phi d_2$
- Overall height:  $\phi d_4$
- Inner circular feature diameter:  $\phi d_3$
- Distance from top edge to center of holes:  $4.1 \pm 0.25 \text{ mm}$
- Distance from bottom edge to center of holes:  $2.4 \pm 0.25 \text{ mm}$
- Thickness of the part:  $t$
- Distance from top edge to the start of the holes:  $t_1$
- Distance from bottom edge to the start of the holes:  $t$

Pump size	$l_1$	$l_2$	$l_3$	$t$	$t_1$	$d_1$	$d_2$	$d_3$	$d_4$
63	35.7	69.9	80	20	10	110	49.1	38	55
112	50.8	88.9	105	25	15	130	77	64	80
180	62	106.4	125	30	20	160	90	76	90
280	69.9	120.7	135	30	-	170	90	90	105
180DT	77.8	130.2	145	30	20	190	115.4	100	120
280DT	77.8	130.2	145	30	20	190	115.4	100	120

Pump size	d <sub>5</sub>	C	SAE Pipe Size	Screw Size
63	14	3	1 1/2	M12-35
112	14	3	2 1/2	M12-40
180	18	3	3	M16-50
280	18	4	3	M16-50
180DT	18	4	4	M16-50
280DT	18	4	4	M16-50

The specified data is for product description purposes only and may not be deemed to be guaranteed unless expressly confirmed in the contract

Model  
K3VG

Page  
34.34

Data Sheet  
P1001/03.04

